


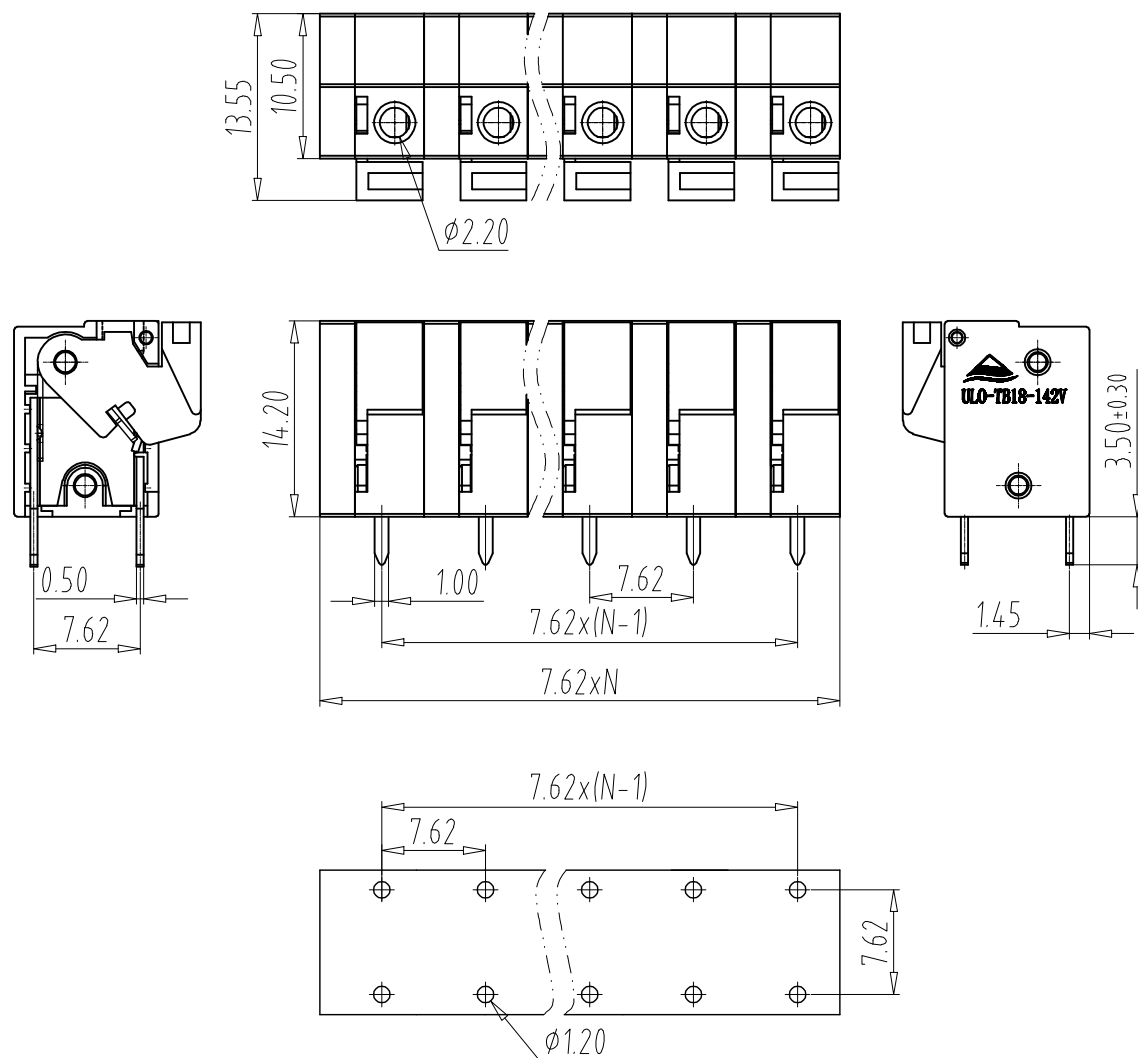

UL Standard

1. Rating voltage/current: 300V/10A
- 2.withstanding voltage: AC2000V/1Min

1.

Pollution Degree	2
Overvoltage Category	I
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	320
Rate Current(A)	15

1.Housing: PA66(UL94V-0)

- 2.End Cover: PA66(UL94V-0)
- 3.Solder Pin: Brass(Sn Plated)
- 4.Lever: PA66(UL94V-0)
- 5.Spring Coil : Stainless

1.Pitch: 7.62mm Poles: 02-24P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
3. RoHS Compliance

ULO-TB18 - 142V/7.62 - XXP - Y 0 0 0A

Certificate Series NO	Factory Code	poles	Customer requirements
--------------------------	-----------------	-------	--------------------------

— color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

Total Pitch Tolerances in mm										Nominal dimension range in mm										$\perp$		$=$	$-$ //		
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 300	over 300 to 330	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10 to all	over 0 to 100	over 100 to 150	over 150 to 150		
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5		

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.06.07	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-TB18-142V/7.62-XXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					DWGNO.	UL0TB18Y000A		