
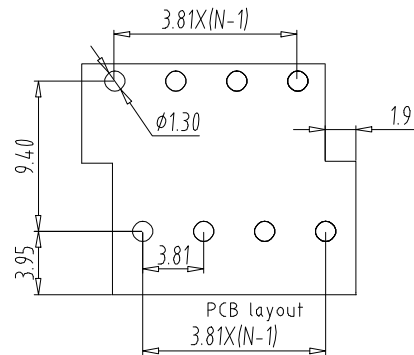
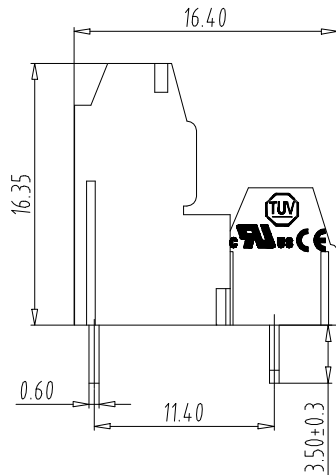



FILE: 2021-D01\UL0

REV	E.C.N NO.	CONTENT	CHK	DATE

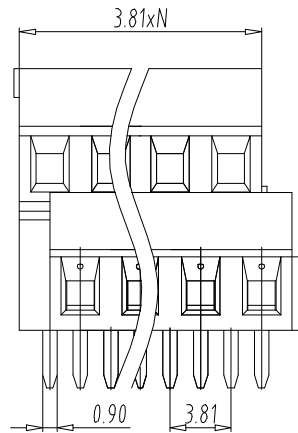

NOTES1:

UL Standard

1. Rating voltage/current: 300V/10A
2. withstanding voltage: AC2000V/1Min
3. Wire range: 18~28AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	130V
Rate Current(A)	10.5A
2. wire range: 1.0mm²

NOTES2:

1. Housing(2P): PA66(UL94V-0)
2. Housing(3P): PA66(UL94V-0)
3. Cage: Brass(Ni Plated)
4. Screw: Steel(Zn Plated/M2.0)
5. Solder Pin: Brsaa(Sn Plated)

NOTES3:

1. Pitch: 3.81mm Poles: 02-24P
2. Operating temperature: -40℃~+105℃
3. RoHS Compliance

How to order

UL0-TB17 - 381A/3.81 - XXP - Y 000A

Certificate Series NO. Factory Code poles Customer requirements

color:

- | | |
|-----------|----------------|
| 1: Grey | 6: Red |
| 2: Blue | 7: transparent |
| 3: Black | 8: Yellow |
| 4: Green | 9: White |
| 5: Orange | |

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$	$-$ //			
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 30	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 30	over 10		over 0	over 100	over 150	
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10	all	to 100	to 100	to 150	
	30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	10		100	100	150	
± 0.18 ± 0.20 ± 0.25 ± 0.3 ± 0.35 ± 0.44 ± 0.55 ± 0.70 ± 0.75										± 0.20 ± 0.25 ± 0.30 ± 0.35 ± 0.44 ± 0.55 ± 0.70 ± 0.80 ± 0.90										0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.05.18	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE						
NINGBO UL0 ELECTRONICS CO.,LTD.				NAME	UL0-TB17-381A/3.81-XXP-Y000A			
宁波欧路电子有限公司				DWGN0.	UL0TB17Y000A			