


FILE: 2021-D01VULO									
REV		EC.N NO.		CONTENT		CHK		DATE	

5.08X(P-1)+19.28

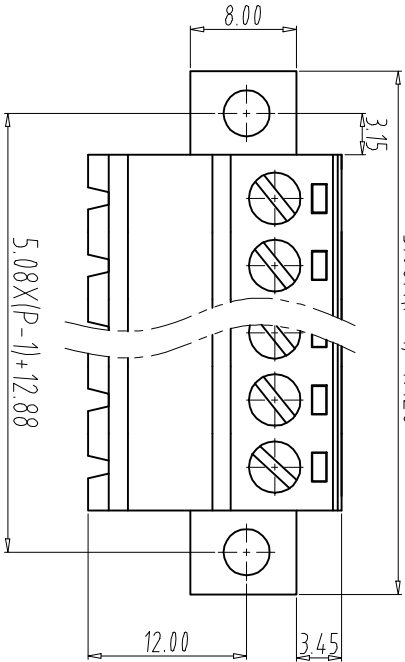

- NOTES1:
- UL Standard
1. Rating voltage/current: 300V/16A
 - 2.withstanding voltage: AC1600V/1min
 - 3.Torque value: M2.5,3.5N·m
 - 4.Wire range: 28~16AWG
- IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A


2. Torque value: M2.5, 0.4Nm
- 3.wire range: 0.2~2.5mm²

NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Pin: Brass (Sn Plated)
- 4.Cage: Brass (Ni Plated)
- 5.Screw: Steel (M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.Stripping length: 7~8mm
- 4.ReHS Compliance

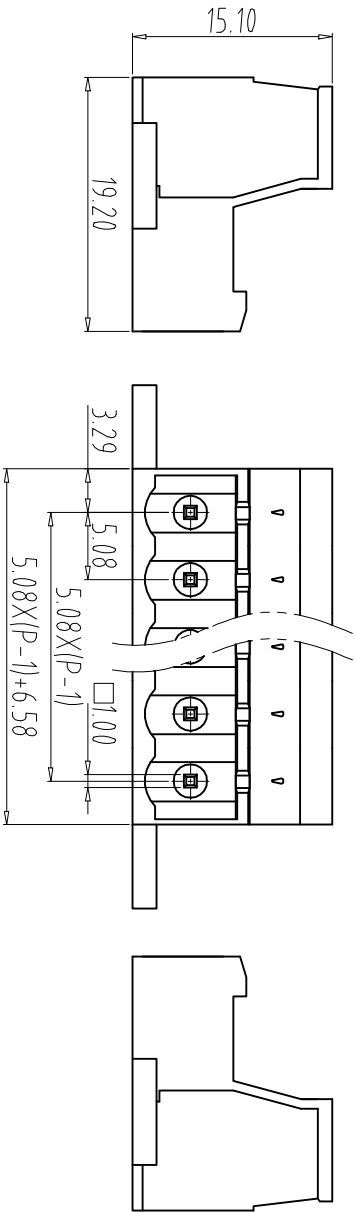

How to order

UL0-TB30 - 2KRF/5.08 - XXP - Y 0 0 0A

Certificate Factory poles Customer requirements

Series NO. Code

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:White

Total Pitch Tolerances		Nominal dimension range		T		=		—		//	
in mm		in mm									

over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.35
6									5		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	ZJL	DATE	21.01.05	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB30-2KRF/5.08-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO.,LTD.

DWGNO. UL0TB30Y000A