

UL Standard

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

2.Wire range:28-12AWG

IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2KV
Rate Voltage(V)	320V
Rate Current(A)	15A

2.Wire range:1.0-2.5mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
2.Cover:PA66(UL94V-0)
3.Cage:Brass(Ni Plated)
4.Clamp:Phosphor Brons(Tin Plated)
5.Screw:Steel(Zn Plated)
6.Screw:Steel(Zn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
2.Stripping length: 7mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order


ULO-TB27 - 2KM/5.08 - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles	Customer requirements
---------------------------	-----------------	-------	--------------------------

color:

1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.04.21	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-TB27-2KM/5.08-XXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					DWGNO	ULOTB27Y000A		

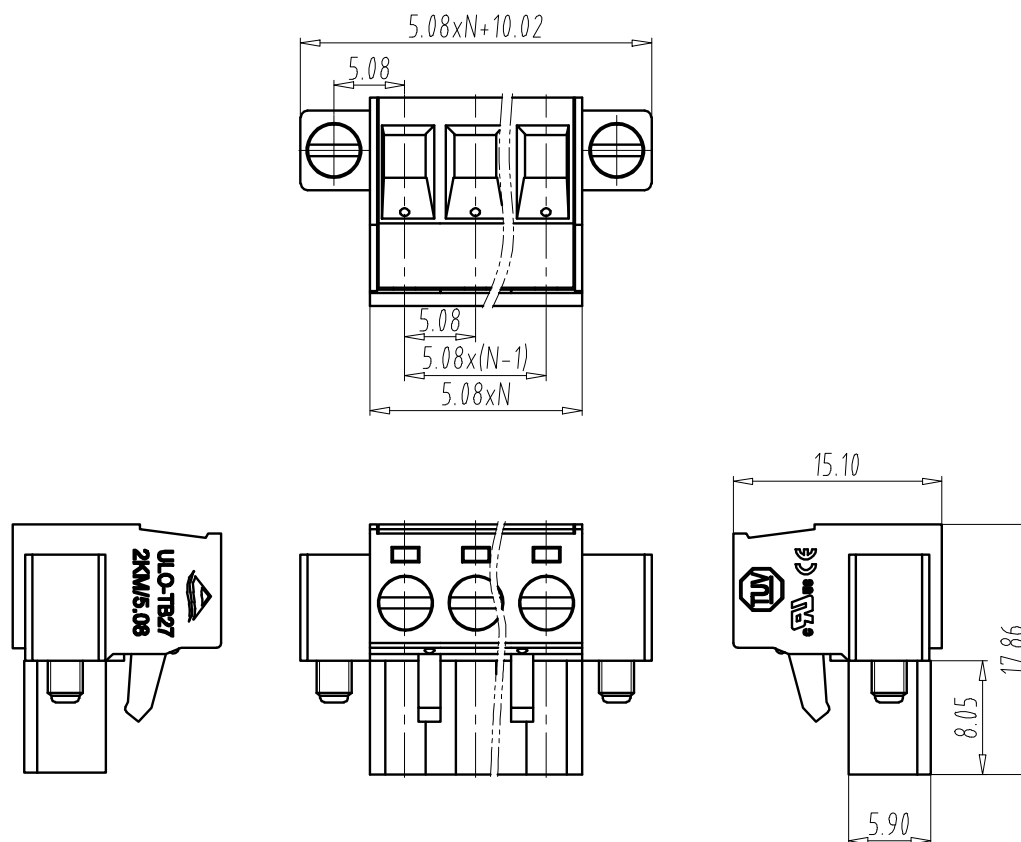

A	Total Pitch Tolerances in mm										Nominal dimension range in mm										$\perp$		$\equiv$	$-$ //		
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10	to 100	to 150				
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2		0.3	0.5	