


FILE: 2021-D01VUL0

REV E.C.N NO.

CONTENT

CHK DATE

0.80

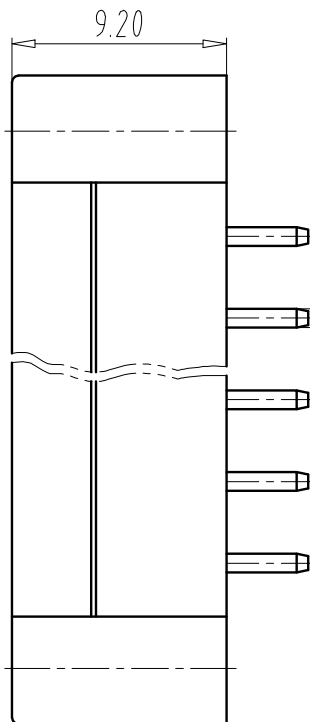


9.20

3.5X(N-1)+13.8


6.90

3.50X(N-1)

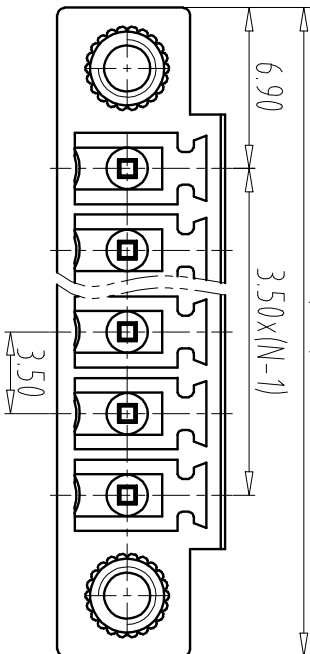


6.90

3.5X(N-1)

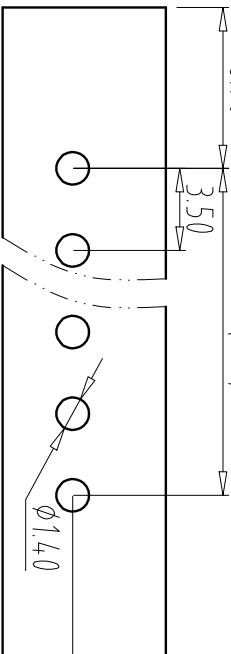

PCB Layout

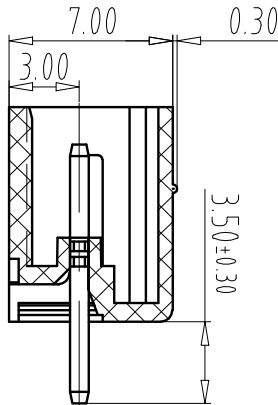

- NOTES2:
- 1.Housing: PA66(UL94V-0)
 - 2.Solder Pin: Red copper(Sn Plated)
 - 3.Nut: Brass
- NOTES3:
- 1.Pitch: 3.5mm Poles: 02-24P
 - 2.Operating temperature: -40℃~+105℃
 - 3.RoHS Compliance

NOTES1:

UL Standard

1	Use group	B	C	D
	Rated Current	8A	—	8A
	Rated Voltage	300V	—	300V

IEC Standard

1	Pollution Degree	2
	Overvoltage Category	II
	Rate Impulse Voltage(kV)	2.5kV
	Rate Voltage(V)	250V
	Rate Current(A)	7A

How to order

UL0-1B01 - 15VM/3.5 - XXP - Y 0 0 0 A

Certificate Factory poles

Series NO. Code

Customer requirements

color:

- 1:Grey
- 2:Blue
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:White

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.27	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-1B01-15VM/3.5-XXP-Y000A		

NINGBO UL0 ELECTRONICS CO.,LTD.

UL01B01Y000A