
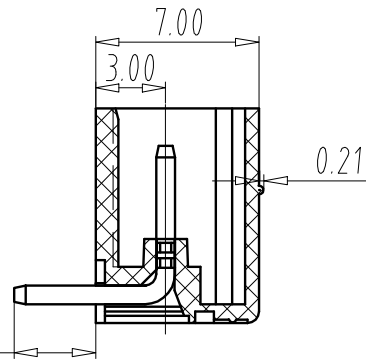
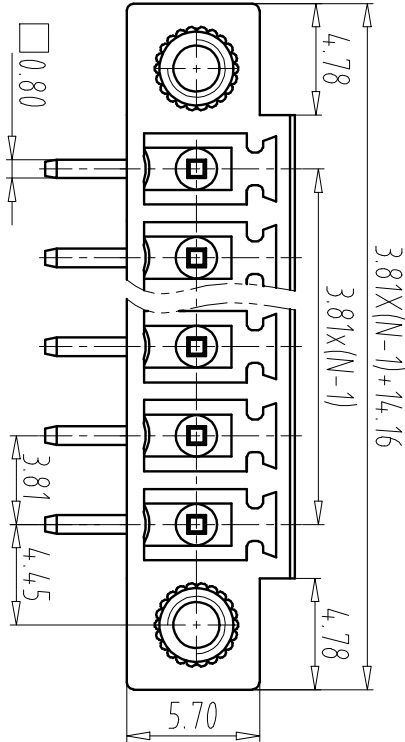


FILE: 2021-D01VUL0

REV EC.N NO.

CONTENT

CHK DATE

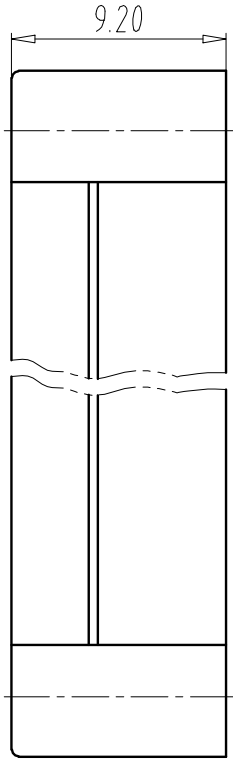

NOTES1:
UL Standard

1	Use group	B	C	D
	Rated Current	8A	—	8A
	Rated Voltage	300V	—	300V

IEC Standard

1	Pollution Degree	2
	Overvoltage Category	II
	Rate Impulse Voltage(KV)	2.5KV
	Rate Voltage(V)	250V
	Rate Current(A)	7A

- NOTES2:
- 1.Housing: PA66(UL94V-0)
 - 2.Solder Pin: Red copper(Sn Plated)
 - 3.Nut: Brass

- NOTES3:
- 1.Pitch: 3.81mm Poles: 02-24P
 - 2.Operating temperature: -40℃~+105℃
 - 3.RoHS Compliance

How to order
UL0-IB3 - 15RM/3.81 - XXP - Y 0 0 0 A
Certificate Factory poles
Series NO. Code

Customer requirements
color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

Total Pitch Tolerances		Nominal dimension range												—	//
in mm		in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over		
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70
0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.27	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4
APP	DATE	NAME	UL0-IB3-15RM/3.81-XXP-Y000A		1/1
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO	UL0IB3Y000A