

FILE: 2021-D01VULO

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

1.	Use group	B	C	D
	Rated Current	15A	-	10A
	Rated Voltage	300V	-	300V

IEC Standard




Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	4.0kV
Rate Voltage(V)	320V
Rate Current(A)	20A

NOTES2:

- 1.Housing: PA66(UL94V-0)
2.Solder Pin: Brass(Sn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

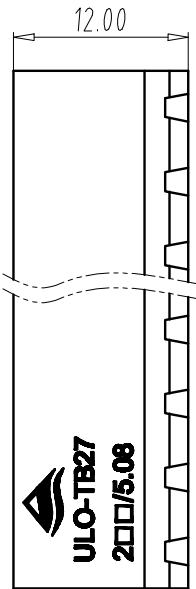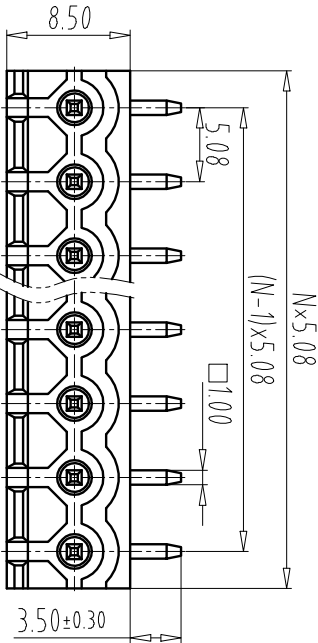

How to order
ULO-TB27 - 2R/5.08 - XXP - Y 0 0 0 A
Certificate Factory poles
Series NO. Code

Customer requirements
color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:white
5:Orange

Total Pitch Tolerances												Nominal dimension range												T		=		—		//	
in mm												in mm																			
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	0	over	0	100	over	0	100	over	0	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	all	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	100	100	100	100	150	150	150	150	150	150	
+0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.28	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	ULO-TB27-2R/5.08-XXP-Y000A		
NINGBO ULO ELECTRONICS CO.,LTD.					UL0TB27Y000A