


FILE: 2021-D01VULO

REV	EC.N NO.	CONTENT	CHK	DATE

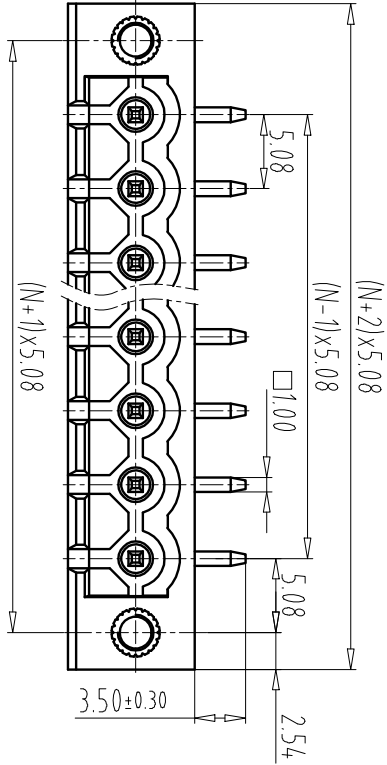

Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	4.0kV
Rate Voltage(V)	320V
Rate Current(A)	20A

- NOTES2:
- 1.Housing: PA66(UL94V-0)
 - 2.Solder Pin: Red copper(Sn Plated)
 - 3.Nut: Brass

- NOTES3:
- 1.Pitch: 5.08mm Poles: 02-24P
 - 2.Operating temperature: -40℃~+105℃
 - 3.RoHS Compliance

How to order

ULO-TB27 - 2RM/5.08 - XXP - Y 0 0 0 A

Certificate Factory poles

Series NO. Code

- Customer requirements
- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

PCB Layout

Total Pitch tolerances in mm												Nominal dimension range in mm												T	≡	—	//
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over			
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to	to			
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150	150	150	150			
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.5			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.28	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4
APP	DATE	NAME	ULO-TB27-2RM/5.08-XXP-Y000A		1/1
NINGBO ULO ELECTRONICS CO.,LTD.					UL0TB27Y000A