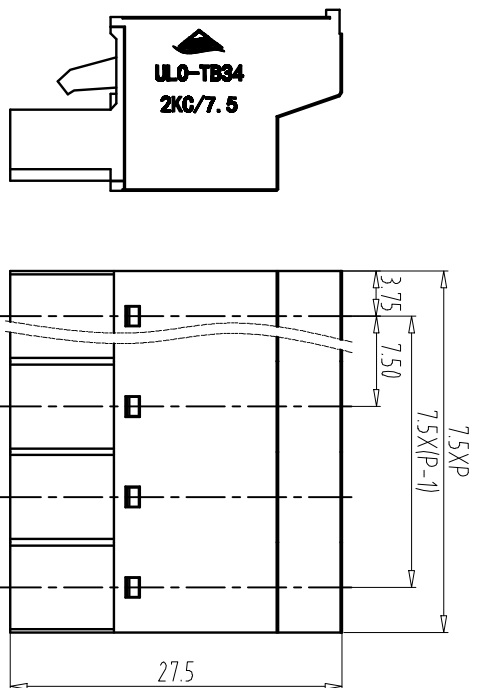
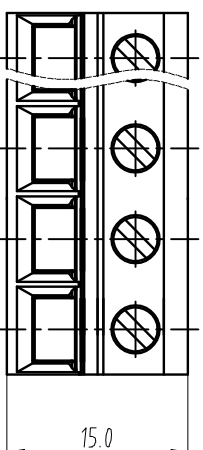


NOTES:

UL Standard

1

Use group	B	C	D
Rated Current	10A	10A	10A
Rated Voltage	300V	150V	300

2. Wire range: 28-12AWG

IEC Standard

1

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	630V
Rate Current(A)	20A

2. Wire range: 0.2-2.5mm²

NOTES:

1.Housing: PA66(UL94V-0)

2.(Cover:PA66(UL94V-0)

3.(Cage:Brass(Zn Plated))

4. Clamp: Phosphor Brons (Tin Plated)

5.5.Screw:Steel(Zn Plated)

6. Block: Steel(Zn Plated)

NOTES:

Pitch: 7.5mm Poles: 02-24P

2. Stripping length: 10mm

3 Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

How to order

UL0-TB34 - 2KC/7.5 - XXP - Y 0 0 0A

6
 6
 -
 -
 -
 -
 6
 9
 -
 6

Series NO.	Code	requirements
------------	------	--------------

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:White

A	Total Pitch Tolerances	Nominal dimension range	—	//
---	------------------------	-------------------------	---	----

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.06	UNITS	MM	SHEET/OF 1/1

CHK.	DATE	SCALE	1:1	A4	
APP.	DATE				

UL01B34-Y000A	NAME	NINGBO UL0 ELECTRONICS CO.,LTD.
UL01B34-Y000A	DWGNO	宁波欧路电子有限公司

[illegible]