


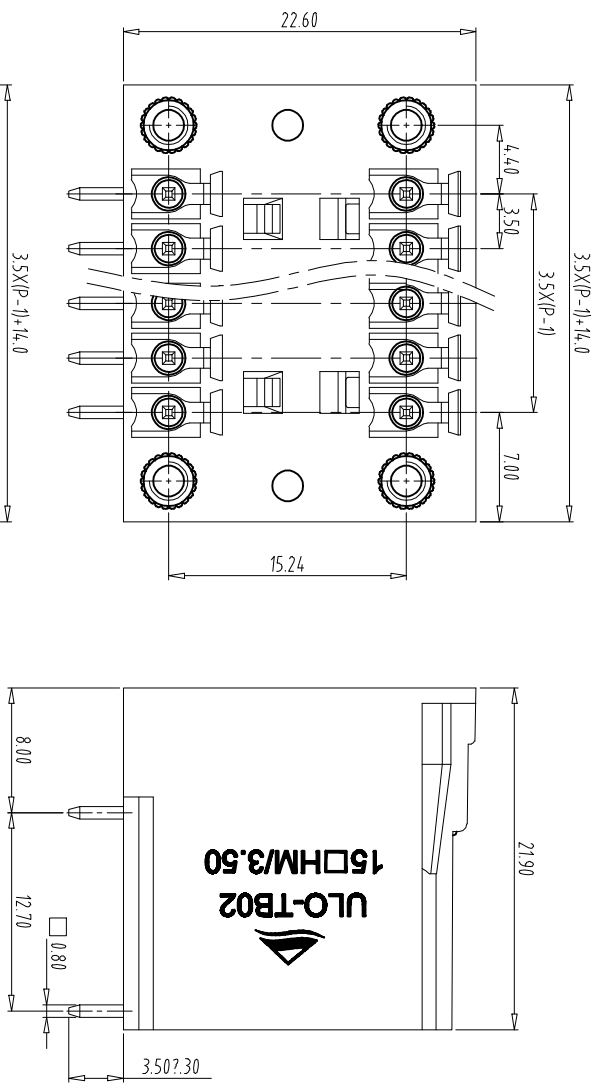

NOTES1:
UL Standard
1. Rating voltage/current: 300V/8A
IEC Standard
1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES2:
1.Housing: PA66(UL 94V-0)
2.Cover: PA66(UL 94V-0)
3.Solder Pin1: Brass(Sn Plated)
4.Solder Pin2: Brass(Sn Plated)
5.Nut: Brass

NOTES3:
1.Pitch: 3.5mm Poles: 2X(02-24)P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order
ULO-TB02 - 1SRHM/3.5 - 2XX X P - Y 0 0 0 A
Certificate Factory poles
Series NO. Code
Customer requirements
color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

PCB Layout

Total Pitch Tolerances												Nominal dimension range												—		//					
in mm												in mm																			
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	100	over	over	over	over	over	over	over	over	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	10	all	100	100	150	150	150	150	150	150	150	150	150
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3	0.2	0.3	0.2	0.3	0.2	0.3	0.5	0.5	

DWG.	ZJL	DATE	21.01.19	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1 : 1	A4	
APP.		DATE		NAME	ULO-TB02-5SRHM/3.5-2XXP-Y000A		
				NINGBO ULO ELECTRONICS CO.,LTD.			
宁波欧路电子有限公司				DWGNO.			
				UL0TB02Y000A			