


FILE: 2020-D01VUL0




REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

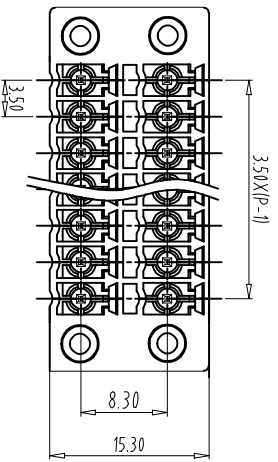

NOTES1:
UL Standard
1. Rating voltage/current: 300V/8A
2. withstanding voltage: AC1600V/1Min
IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

NOTES2:
1.Housing: PA66(UL94V-0)
2. Solder Pin: Brass(Sn Plated)

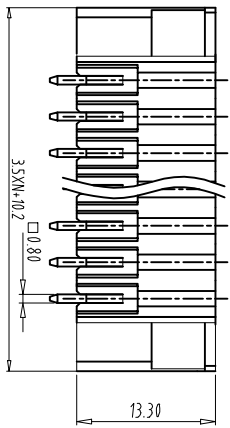


NOTES3:
1.Pitch: 3.50mm Poles: 2x(02-24)P
2.Operating temperature: -40℃~+105℃
4. RoHS Compliance

How to order
UL0-TB01 - 15KNVHM/3.5 - 2xXXP - Y 0 0 0A

Certificate Factory poles
Series NO. Code requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

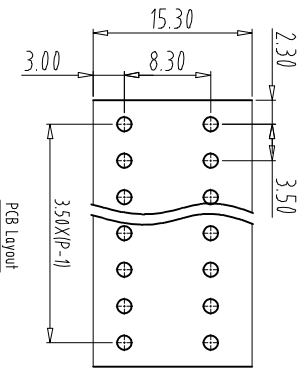

PCB Layout

Total Pitch Tolerances										Nominal dimension range												
in mm										in mm												
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150	150
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3
6									5									4				0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.10.13	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB01-15KNVHM/3.5-2xXXP-Y000A		

