

FILE: 2021-D01VULO					
REV	ECN NO.	CONTENT	CHK	DATE	

NOTES1:

UL Standard

1. Rating voltage/current: 300V/8A
2. withstanding voltage: AC1600V/1Min

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

NOTES2:

- 1.Housing: PA66(UL94V-0)
2. Solder Pin: Brass(Sn Plated)

NOTES3:

- 1.Pitch: 3.50mm Poles: 2xXXP
2.Operating temperature: -40℃~+105℃
4. RoHS Compliance

How to order


ULO-TB01 - 15KNRHG/3.5 - 2xXXP - Y 0 0 0A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

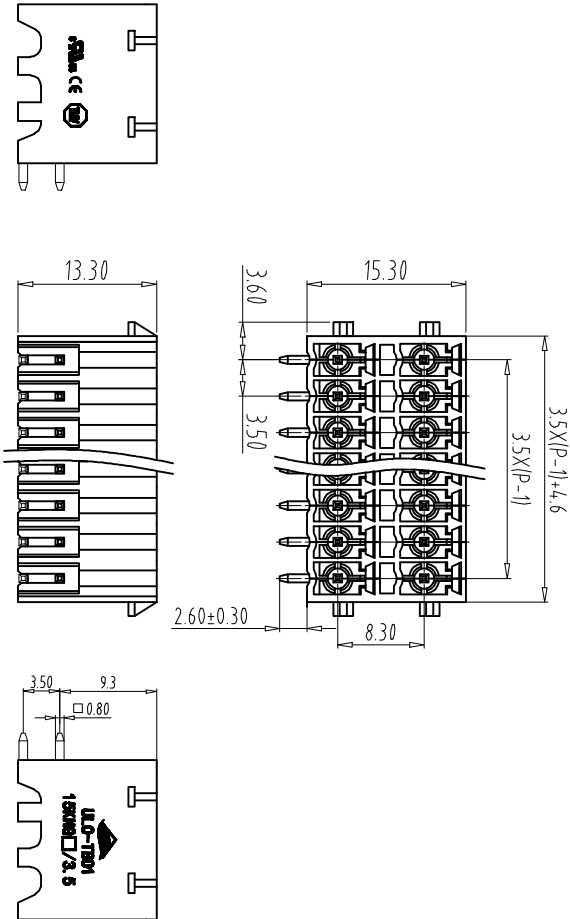

PCB Layout

Total Pitch Tolerances		Nominal dimension range									
over	in mm	over	in mm	over	in mm	over	in mm	over	in mm	over	in mm
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.35
6									5		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	2022.02.28	UNITS	MM
CHK	DATE		SCALE	1:1	A4
APP.	DATE		NAME	ULO-TB01-15KNRHG/3.5-2xXXP-4000A	1/1
				DWGNO.	UL0TB0Y000A



NINGBO ULO ELECTRONICS CO.,LTD.