
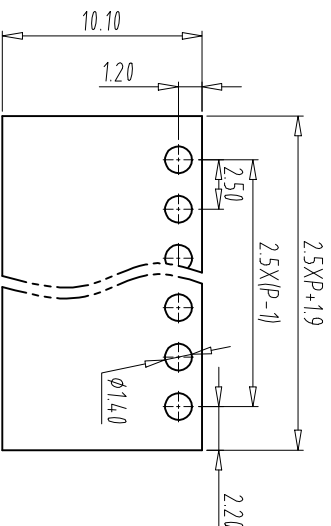
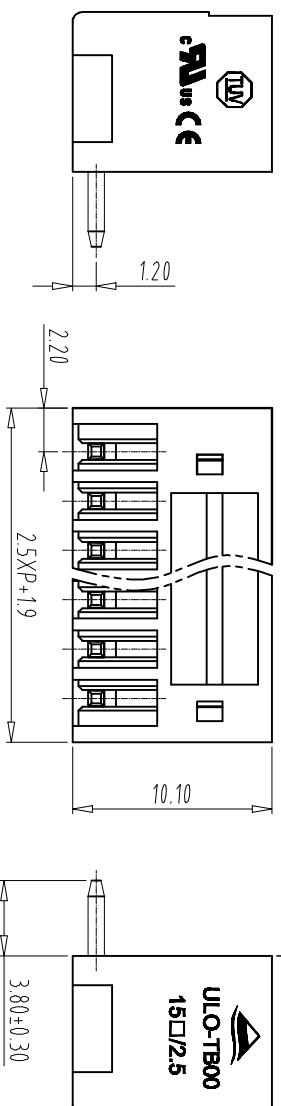


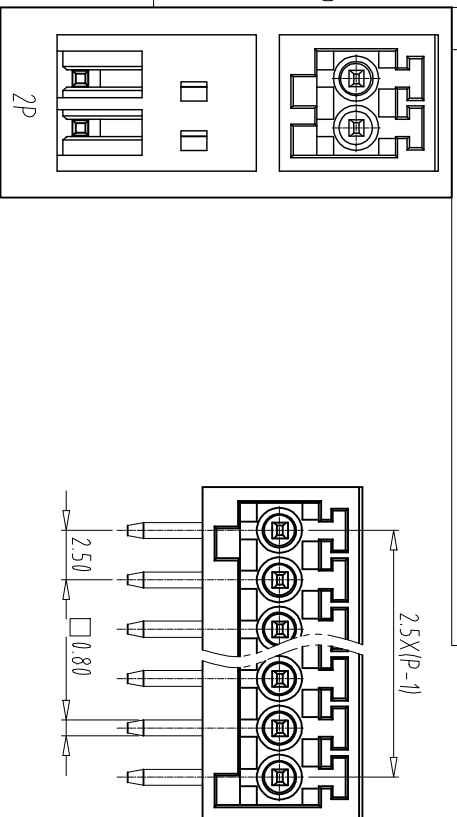

PCB Layout

[illegible]

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

- | Use group | B | C | D |
|---------------|------|------|------|
| Rated Current | 4A | 4A | 4A |
| Rated Voltage | 150V | 150V | 150V |

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	I
Rate Impulse Voltage(KV)	—	—	2.5KV
Rate Voltage(V)	—	—	250V
Rate Current(A)	—	—	5A

2.Rating voltage/current: 250V/5A

NOTES:

1.Housing: PA66(UL94V-0)

2.Solder Pin: Brass(Sn Plated)

NOTES3

1.Pitch: 2.50mm Poles: 02-24P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

How to order

UL0-TB00 - 15RC/2.5 - XXP - Y 0 0 0 0A

Certificate Series NO.	Factory Code	poles	Customer requirements
---------------------------	-----------------	-------	--------------------------

color:

1: Grey	2: Blue	3: Black
4: Green	5: Orange	6: Red
7: transparent	8: Yellow	9: white

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:white

ITEM	NAME OF PART	NO OF PART	QTY	MATERIAL	NOTE
DWG.	LZW	DATE 22.02.22	UNITS	MM	1/1
CHK.		DATE	SCALE	A4	
APP.		DATE			



NINGBO UL0 ELECTRONICS CO., LTD
宁波欧路电子有限公司

DWGNO.	UL0TB00Y000A
--------	--------------