
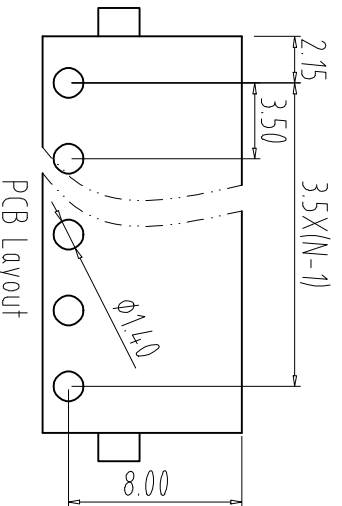
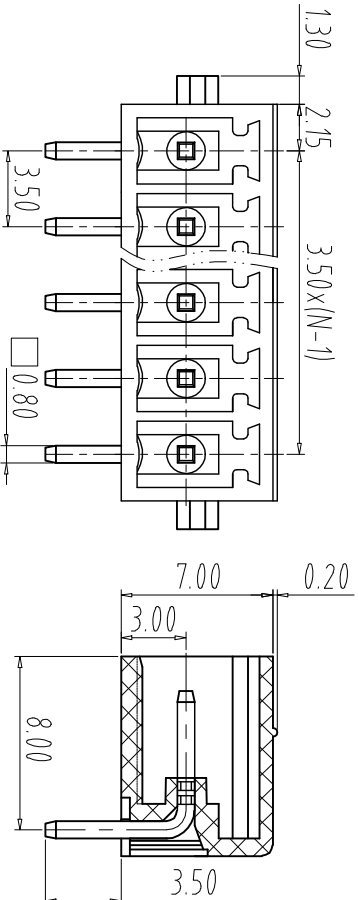


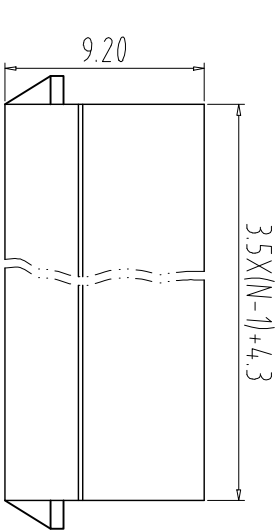

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	8A	-	8A
Rated Voltage	300V	-	300V

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate impulse voltage(kV)	2.5kV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Brass(Sn Plated)

NOTES3:

- 1.Pitch: 3.5mm Poles:02-24P
 - 2.Operating temperature: -40℃~+105℃
 - 3.RoHS Compliance
- How to order
- UL0-TB01 - 1SRG/35 - XXP - Y 0 0 0A

Certificate Factory poles
Series NO. Code

Customer requirements

- color:
- 1:Grey
 - 2:Blue
 - 3:Black
 - 4:Green
 - 5:Orange
 - 6:Red
 - 7:transparent
 - 8:Yellow
 - 9:White

Total Pitch Tolerances												Nominal dimension range												±	=	—	//
in mm												in mm															

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	100	over	over	over	over	over	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10										
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5					
6									5									4										

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.04.19	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	A4
APP.	DATE	NAME	UL0-TB01-1SRG/35-XXP-Y000A		
		DWGNO.	UL0B0Y000A		



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司