

FILE: 2021-D01VUL0





REV

ECN NO.

CONTENT

CHK

DATE

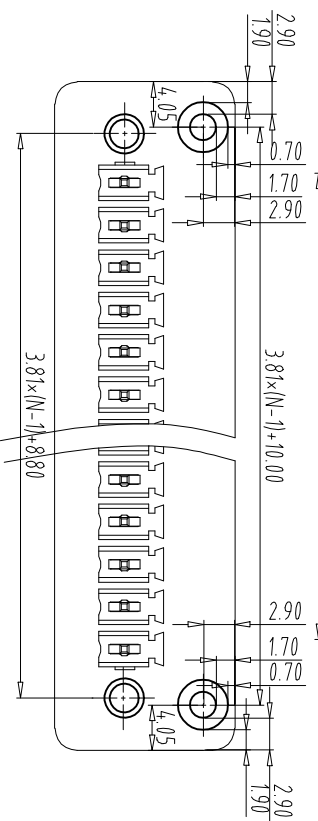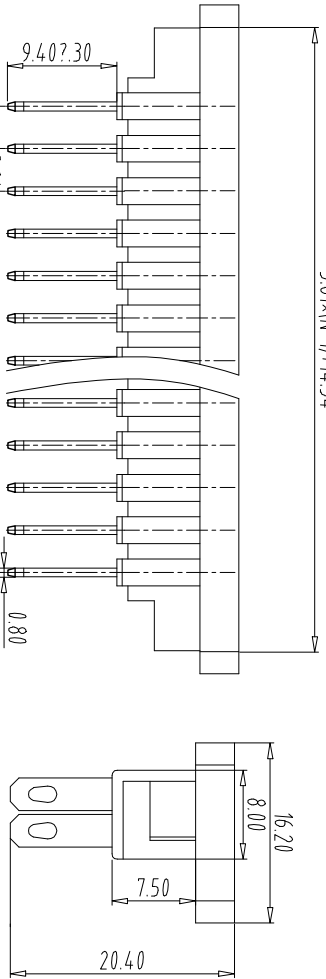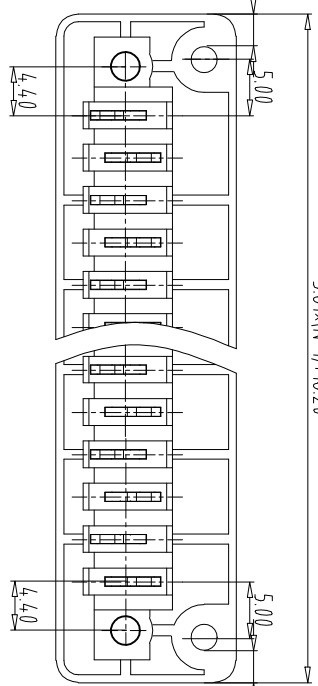

NOTES1:

UL Standard

1

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

IEC Standard

1

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	2.0kV
Rate Voltage(V)	320V
Rate Current(A)	12A

NOTES2:

1.Housing: PA66(UL94V-0)

2.Pin: Brass(Tin Plated)

3.Nuts: Steel(M2.5)

NOTES3:

1.Pitch: 3.81mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

UL0-1B3 - 15(B/3.81 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code
Customer requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

Total Pitch Tolerances										Nominal dimension range												
in mm										in mm												
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150	150
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.15	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-1B3-15(B/3.81-XXP-Y000A		
		DWGNO.	UL0TB3Y000A		

