

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1. Rating voltage/current: 300V/15A

2.withstanding voltage: AC1600V/1Min

IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	10A

NOTES:

1.Housing: PA66(UL94V-0)

2.Solder Pin: Brass(Sn Plated)

NOTES:

1.Pitch: 5.08mm Poles:04-48P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

How to order

UL0-TB28 - 2VTC/5.08 - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles

Customer requirements

color:

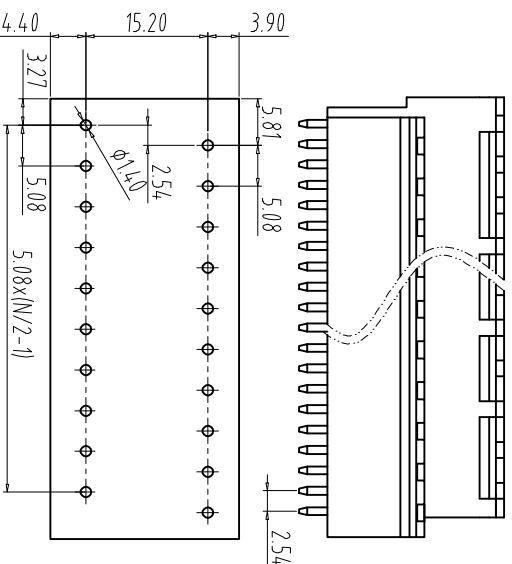

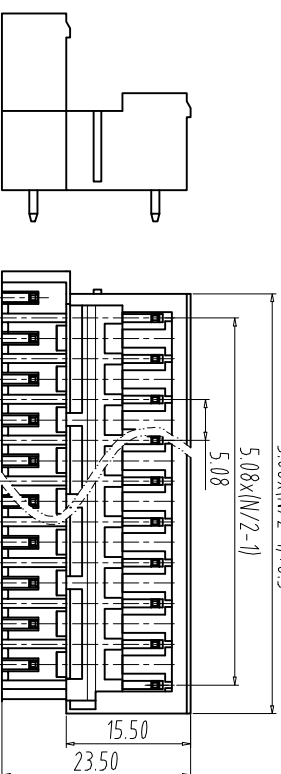
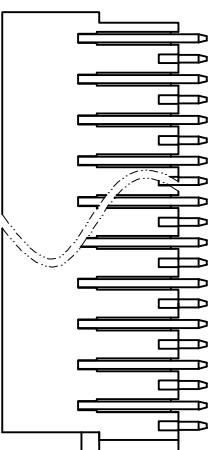
1:Grey 6:Red

2:Blue 7:transparent

3:Black 8:Yellow

4:Green 9:White

5:0range

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	L Z W	DATE	2021.03.19	UNITS	MM	SHEET/OF 1/1
CHK.	DATE			SCALE	1:1	A4
APP.	DATE					 

