

FILE: 2020-D01VUL0

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1. Rating voltage/current: 300V/15A

2.withstanding voltage: AC1600V/1min

IEC Standard

1. Pollution Degree

Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	10A

NOTES2:

1.Housing: PA66(UL94V-0)

2.Solder Pin: Brass(Sn Plated)

NOTES3:

1.Pitch: 5.08mm Poles:04-48P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance



How to order

UL0-TB28 - 2RT/5.08 - XXP - Y 0 0 0A

Certificate
Series NO. Factory Code poles

Customer requirements

- color:
- 1:Grey
 - 2:Blue
 - 3:Black
 - 4:Green
 - 5:Orange
 - 6:Red
 - 7:transparent
 - 8:Yellow
 - 9:White

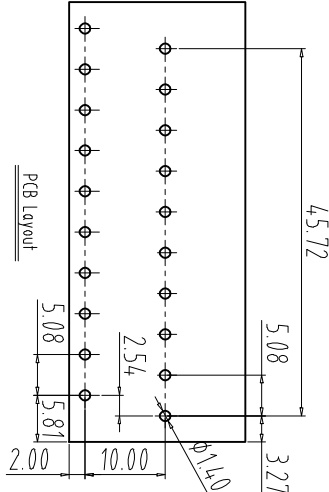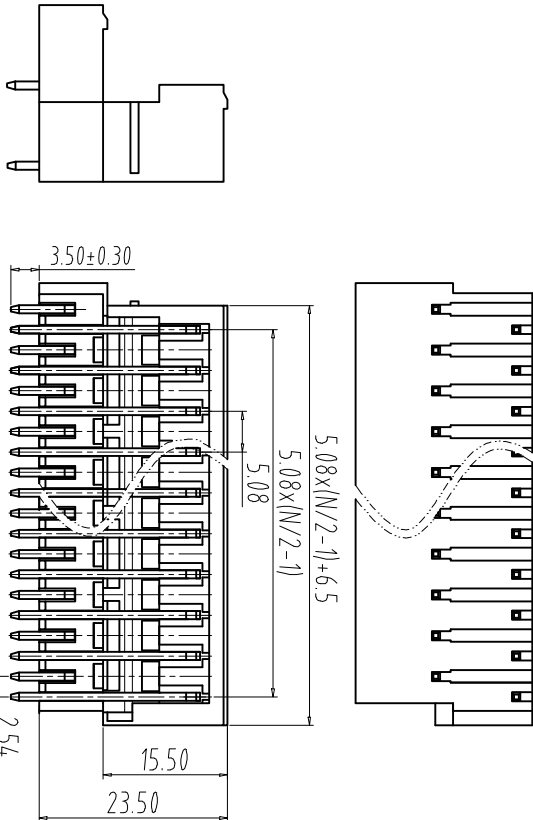

Total Pitch Tolerances										Nominal dimension range										±	=	//
in mm										in mm												

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3
6									5									4				

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	2021.03.19	UNITS	MM
CHK.	DATE		SCALE	1:1	A4
APP.	DATE		NAME	UL0-TB28-2RT/5.08-XXP-Y000A	1/1
			DWGNO.	UL0TB39Y000A	



NINGBO UL0 ELECTRONICS CO.,LTD.