


FILE: 2020-D01VUL0					
REV	ECN NO.	CONTENT		CHK	DATE

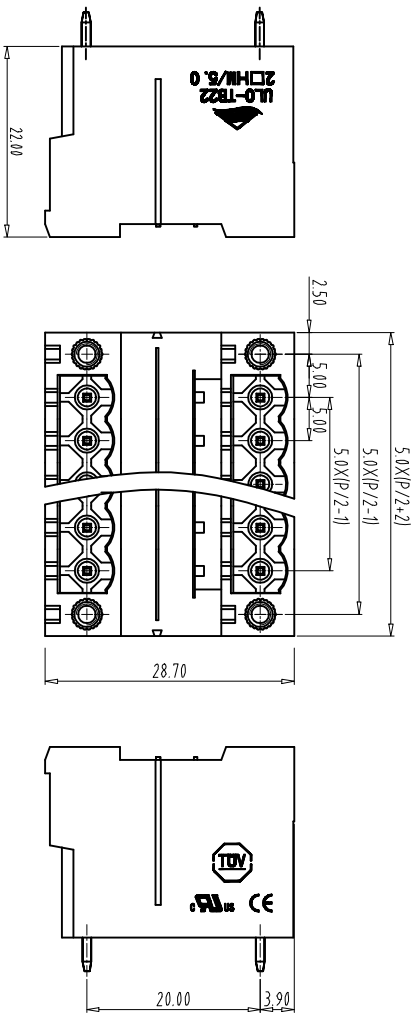

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	4.0kV
Rate Voltage(V)	320V
Rate Current(A)	10A

- NOTES2:
- Housing: PA66(UL94V-0)
 - Cover: PA66(UL94V-0)
 - Solder Pin: Brass(Sn Plated)
 - Nut: Brass

- NOTES3:
- Pitch: 5.0mm Poles: 2X(02-24)p
 - Operating temperature: -40℃~+105℃
 - 4.RoHS Compliance

How to order
UL0-TB22 - 2VHM/5.0 - 2xXXp - Y 0 0 0A

Certificate Factory poles
Series NO. Code requirements

- Customer requirements color:
- 1:Grey
 - 2:Blue
 - 3:Black
 - 4:Green
 - 5:Orange
 - 6:Red
 - 7:transparent
 - 8:Yellow
 - 9:White

Total Pitch Tolerances		Nominal dimension range					
in mm		in mm					
over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200
to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.28	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB22-2VHM/5.0-2xXXp-Y000A		
				DWGNO.	UL0TB2Y000A