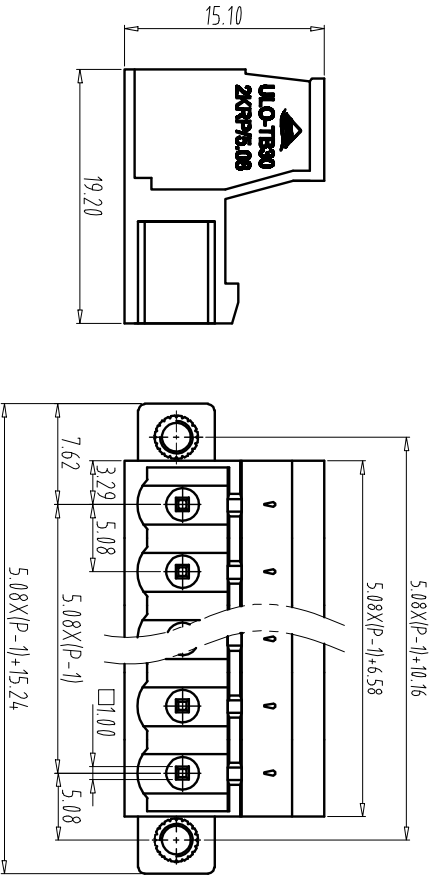
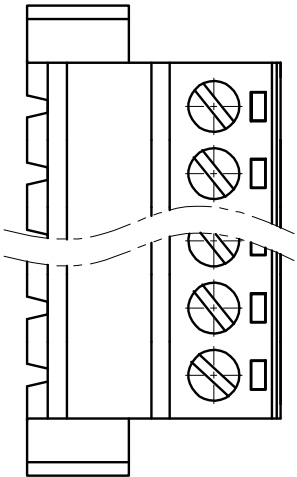


NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

3 Torque value: M3.0, 4, 4.3Lb.in
4. Wire range: 28~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

2. Torque value: M3.0, 0.5Nm
3 wire range: 1.0~2.5mm²

NOTES2:

1.Housing: PA66 (UL94V-0)
2.Cover: PA66 (UL94V-0)
3.Pin: Brass (Sn Plated)
4.Cage: Brass (Ni Plated)
5.Screw: Steel (M3.0,Zn Plated)
6.Nut: Brass

NOTES3:

1.Pitch: 5.08mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.Stripping length: 7mm
4.RoHS Compliance

How to order
UL0-TB30 - 2KRP/5.08 - XXP - Y 0 0 0A

Certificate Factory poles Customer requirements
Series NO. Code

color:
1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

Total Pitch Tolerances										Nominal dimension range										±	≠	—	//
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	0	100	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	150
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150	150	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5
6										5										4			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	21.01.05	UNITS	MM
CHK		DATE		SCALE	1:1
APP.		DATE		NAME	UL0-TB30-2KRP/5.08-XXP-Y000A
				DWGNO.	UL0TB30Y000A



NINGBO UL0 ELECTRONICS CO., LTD.
宁波欧路电子有限公司