


FILE: 2021-D01VULO

REV E.C.N NO.

CONTENT

CHK

DATE

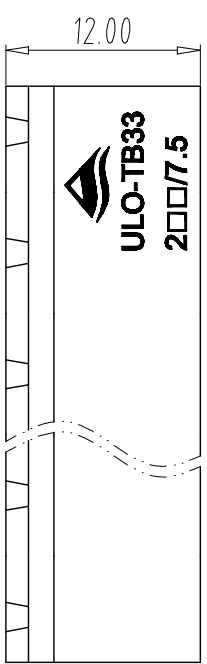

NOTES1:
UL Standard

1	Use group	B	C	D
	Rated Current	15A	-	10A
	Rated Voltage	300V	-	300V

IEC Standard


2	Pollution Degree	2
	Overvoltage Category	II
	Rate Impulse Voltage(kV)	4.0kV
	Rate Voltage(V)	400V
	Rate Current(A)	20A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Brass(Sn Plated)

NOTES3:

- 1.Pitch: 7.5mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

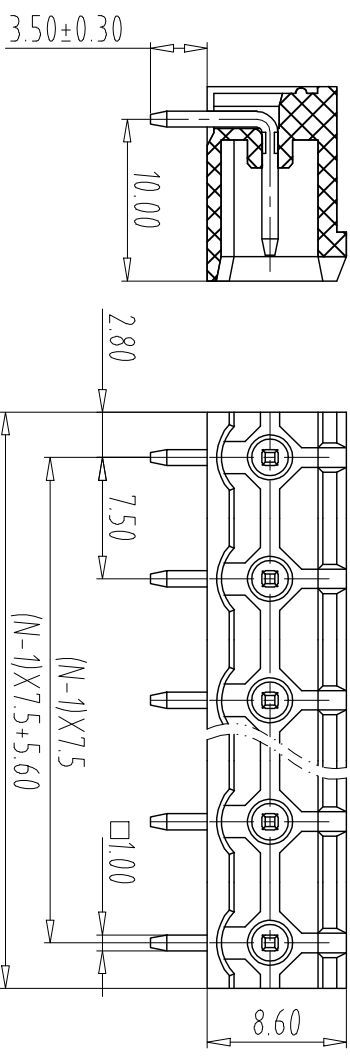

How to order


ULO-TB33 - 2R/7.5 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

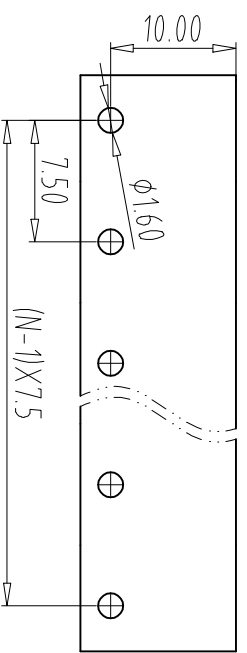

Total Pitch Tolerances										Nominal dimension range										⊥	≡	—	//
in mm										in mm													

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	30	53	70	90	115	150	200
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	100	100	150	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5
6										5										4			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.28	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	A4 1/1
APP.	DATE	NAME	ULO-TB33-2R/7.5-XXP-Y000A		
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.	ULOTB33Y000A	



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司