


FILE: 2020-D01VULO									
REV		EC.N NO.		CONTENT		CHK		DATE	

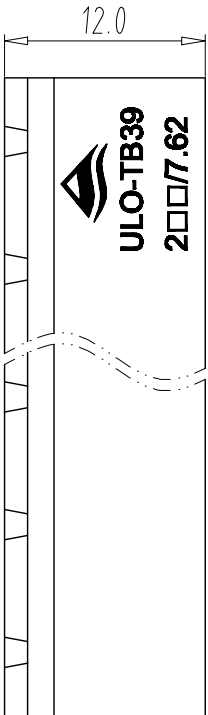

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rated impulse Voltage(kV)	2.5kV
Rated Voltage(V)	400V
Rated Current(A)	20A

NOTES2:

1.Housing: P A66(UL94V-0)

2.Solder Pin: Brass(Sn Plated)

NOTES3:

1.Pitch: 7.62mm Poles: 02-24P

2.Stripping length: 6-7mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

UL0-TB39 - 2RC/7.62 - XXP - Y 000 A

Certificate Factory poles

Series NO. Code

Customer requirements

color:



1:Grey 6:Red

2:Blue 7:transparent

3:Black 8:Yellow

4:Green 9:White

5:Orange

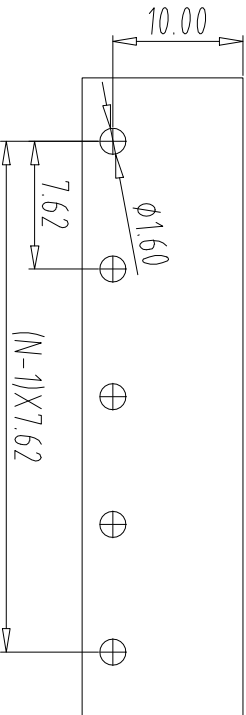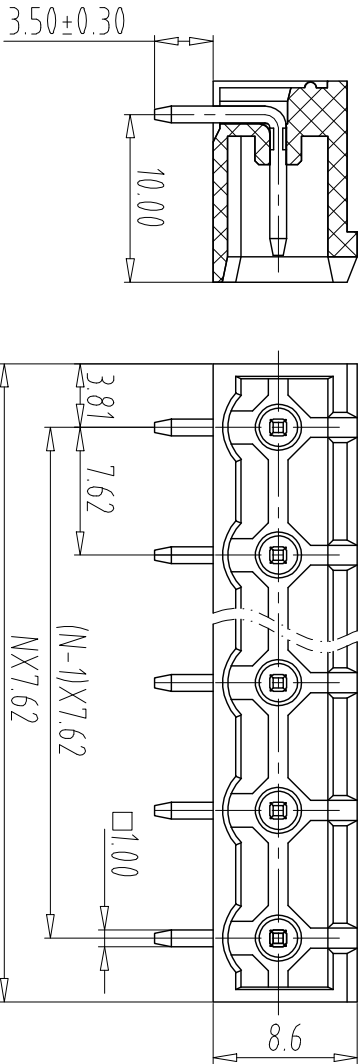

Total Pitch Tolerances		Nominal dimension range		T		≠		—		//	
in mm		in mm									
over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	0	30	53
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
6	6	6	6	6	6	6	6	6	6	6	6

NINGBO UL0 ELECTRONICS CO.,LTD.

UL0-TB39-2RC/7.62-XXP-Y000A