


FILE: 2021-D01VULO

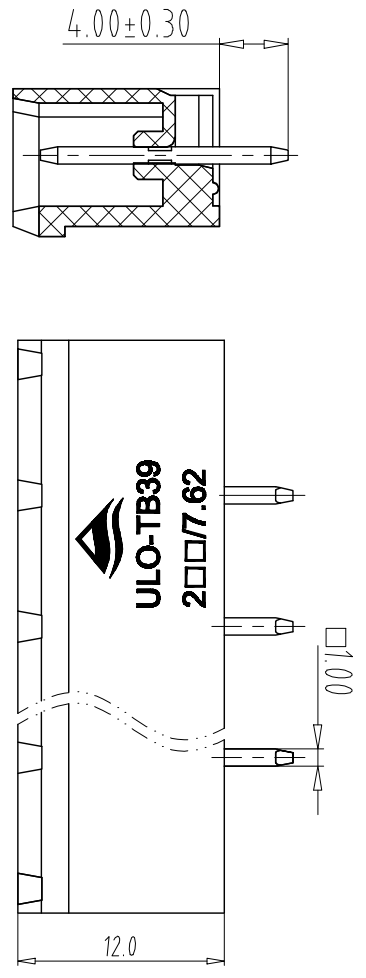

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	400V
Rate Current(A)	20A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Brass(Sn Plated)
- 3.Nut: Brass

NOTES3:

- 1.Pitch: 7.62mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

ULO-TB39 - 2WM/7.62 - X X P - Y 0 0 0 A

Certificate
Series NO. Factory Code poles

Customer requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

Total Pitch Tolerances												Nominal dimension range				⊥	≡	—	//
in mm												in mm							

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3
6									5									4	0.2

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.17	UNITS	MM
CHK.	DATE		SCALE	1 : 1	A4
APP.	DATE		NAME	ULO-TB39-2WM/7.62-XXP-Y000A	1/1

