
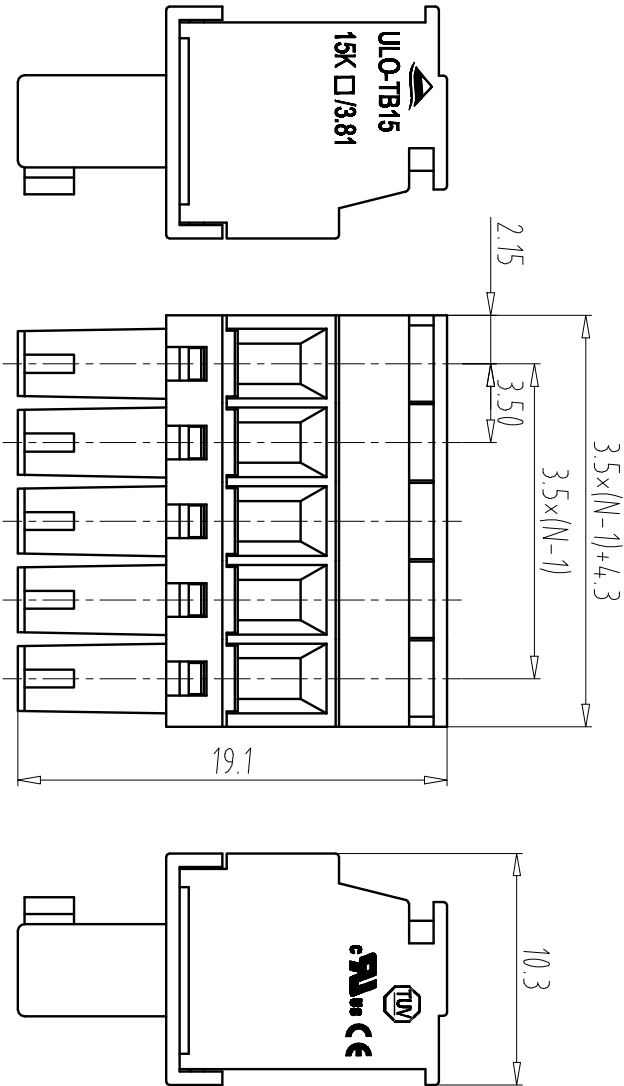


FILE: 2021-D01VULO					
REV	EC.N NO.	CONTENT		CHK	DATE

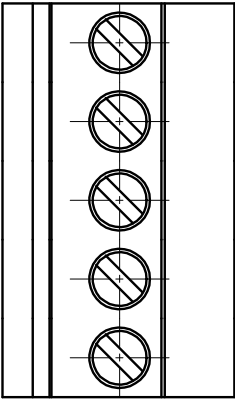

- NOTES1:
- UL Standard
1. Rating voltage/current: 300V/8A
- 2.withstanding voltage: AC2000V/1min
- 3.Wire range: 16~28AWG
- 4.Torque value: M2.5,3.54LbIn
- IEC Standard
- 1.

Pollution Degree	2
Overvoltage Category	2
Rate impulse Voltage(kV)	2.5kV
Rate Voltage(V)	250V
Rate Current(A)	7A

- 2 wire range: 0.5-15mm²
- 3.Torque value: M2.5,0.4Nm
- NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Conductor: Brass(Sn Plated)
- 3.Spring: Stainless Steel
- 4.Screw: Steel(M2.5,Zn Plated)

- NOTES3:
- 1.Pitch: 3.5mm Poles: 02-24P
- 2.Stripping length: 7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

UL-O-TB03 - 15KA/3.5 - XXP - Y 0 0 0 A

Certificate Factory poles

Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:white
- 5:Orange

Total Pitch Tolerances										Nominal dimension range										±	≡	—	//
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over				
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all				
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100				
±0.18 ±0.20 ±0.25 ±0.3 ±0.35 ±0.44 ±0.55 ±0.70 ±0.75 ±0.80 ±0.90 ±1.0 ±1.2 ±1.5 ±2.0 ±2.5 ±3.0 ±3.5 ±4.0 ±4.5 ±5.0 ±6.0 ±7.0 ±8.0 ±9.0 ±10 ±12 ±15 ±20 ±25 ±30 ±35 ±40 ±45 ±50 ±55 ±60 ±65 ±70 ±75 ±80 ±85 ±90 ±95 ±100 ±105 ±110 ±115 ±120 ±125 ±130 ±135 ±140 ±145 ±150 ±155 ±160 ±165 ±170 ±175 ±180 ±185 ±190 ±195 ±200 ±205 ±210 ±215 ±220 ±225 ±230 ±235 ±240 ±245 ±250 ±255 ±260 ±265 ±270 ±275 ±280 ±285 ±290 ±295 ±300 ±305 ±310 ±315 ±320 ±325 ±330 ±335 ±340 ±345 ±350 ±355 ±360 ±365 ±370 ±375 ±380 ±385 ±390 ±395 ±400 ±405 ±410 ±415 ±420 ±425 ±430 ±435 ±440 ±445 ±450 ±455 ±460 ±465 ±470 ±475 ±480 ±485 ±490 ±495 ±500 ±505 ±510 ±515 ±520 ±525 ±530 ±535 ±540 ±545 ±550 ±555 ±560 ±565 ±570 ±575 ±580 ±585 ±590 ±595 ±600 ±605 ±610 ±615 ±620 ±625 ±630 ±635 ±640 ±645 ±650 ±655 ±660 ±665 ±670 ±675 ±680 ±685 ±690 ±695 ±700 ±705 ±710 ±715 ±720 ±725 ±730 ±735 ±740 ±745 ±750 ±755 ±760 ±765 ±770 ±775 ±780 ±785 ±790 ±795 ±800 ±805 ±810 ±815 ±820 ±825 ±830 ±835 ±840 ±845 ±850 ±855 ±860 ±865 ±870 ±875 ±880 ±885 ±890 ±895 ±900 ±905 ±910 ±915 ±920 ±925 ±930 ±935 ±940 ±945 ±950 ±955 ±960 ±965 ±970 ±975 ±980 ±985 ±990 ±995 ±1000																				0.2	0.3	0.5	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.24	UNITS	MM
CHK.	DATE	SCALE	1 : 1	SHEET/OF	A4
APP.	DATE	NAME	UL-O-TB03-15KA/3.5-XXP-Y000A		
NINGBO UL O ELECTRONICS CO.,LTD.			DWGNO.	ULOTB03Y000A	1/1