

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	8A	8A	8A
Rated Voltage	300V	300V	300V

2. Wire range:28-16AWG
IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	12A

2. Wire range:0.2-15mm²
NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Cover: PA66(UL94V-0)
- 3.Clamp: Phosphor Brons(Ni Plated)
- 4.Spring: Stainless Steel
- 5.Button: PA66(UL94V-0)
- 6.Screw: Steel(Zn Plated)

NOTES3:


- 1.Pitch: 3.5mm Poles: XXP
- 2.Operating temperature: -40℃~+105℃
- 3.Stripping length:9.0mm
- 4.RoHS Compliance

How to order

UL0-1B13 - 15KD/35 - XXP - Y 0.0 0A

Certificate Factory poles Customer requirements
Series NO. Code

color:
1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

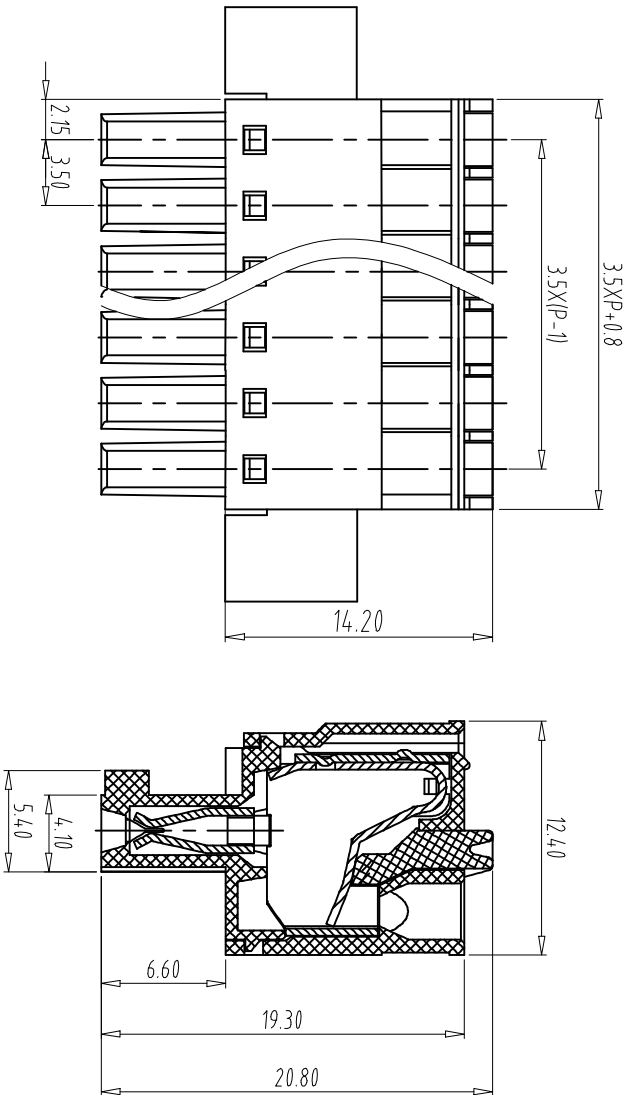

Total Pitch Tolerances										Nominal dimension range										—	//
in mm										in mm											

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.5	
6									5									4			



ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.12	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-1B01-15KDW35-XXP-Y000A		