

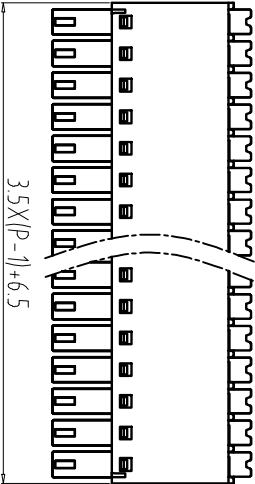


FILE: 2020-D01VUL0						REV	ECN NO.	CONTENT	CHK	DATE
--------------------	--	--	--	--	--	-----	---------	---------	-----	------

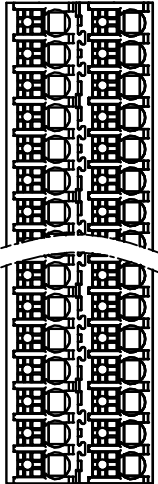

- NOTES1:
UL Standard
1. Rating voltage/current: 300V/8A
 2. withstanding voltage: AC1600V/1Min
 3. Wire range: 16~24AWG
- IEC Standard

Pollution Degree	2	2	3
Overvoltage Category	II	III	III
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	320V	160V	160V
Rate Current(A)	8A	8A	8A

2. wire range: 0.2~1.0mm², 1.5mm²-sol

NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Button: POM
- 4.Conductor: Phosphor Brons (Sn Plated)
- 5.Spring: Stainless Steel

NOTES3:

- 1.Pitch: 3.50mm Poles: 2x(02-24)P
- 2.Stripping length: 8~9mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

UL0-TB01 - 15KN-B/35 - 2xXXP - Y 0 0 0A

Certificate Factory poles
Series NO. Code Customer requirements

- color:
- 1:Grey 5:Orange
 - 2:Blue 6:Red
 - 3:Black 7:transparent
 - 4:Green 8:Yellow
 - 9:white

Total Pitch Tolerances		Nominal dimension range		T		=		—		//	
in mm		in mm									

over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3

DWG.	CHK	DATE	20.12.10	UNITS	MM	SHEET/OF	1/1
CHK		DATE		SCALE	1 : 1	A4	
APP.		DATE		NAME	UL0-TB01-15KN-B/35-2xXXP-Y000A		



DWGNO: UL0TB0Y000A