

FILE: 2020-D01VUL0		6	5	4	3	2	1
REV	ECN NO.	CONTENT				CHK	DATE

NOTES1:
UL Standard

1. Rating voltage/current: 300V/8A
2.withstanding voltage: AC2000V/1Min
3.Wire range:28-16AWG
IEC Standard

1	Pollution Degree	2
	Overvoltage Category	II
	Rate Impulse Voltage(KV)	2.5KV
	Rate Voltage(V)	250V
	Rate Current(A)	7A

2.Wire range:0.5-15mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
2.Cover:PA66(UL94V-0)
3.Cage:Brass(Ni Plated)
4.Clamp:Phosphor Brons(Sn Plated)
5.Screw:Steel(Zn Plated/M2.0)

NOTES3:


- 1.Pitch: 3.81mm Poles: 02-24P
2.Stripping length: 7mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

UL0-TB3 - 15K/3.81 - XXP - Y 0 0 0A

Certificate Factory poles Customer requirements
Series NO. Code

color:
1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:white

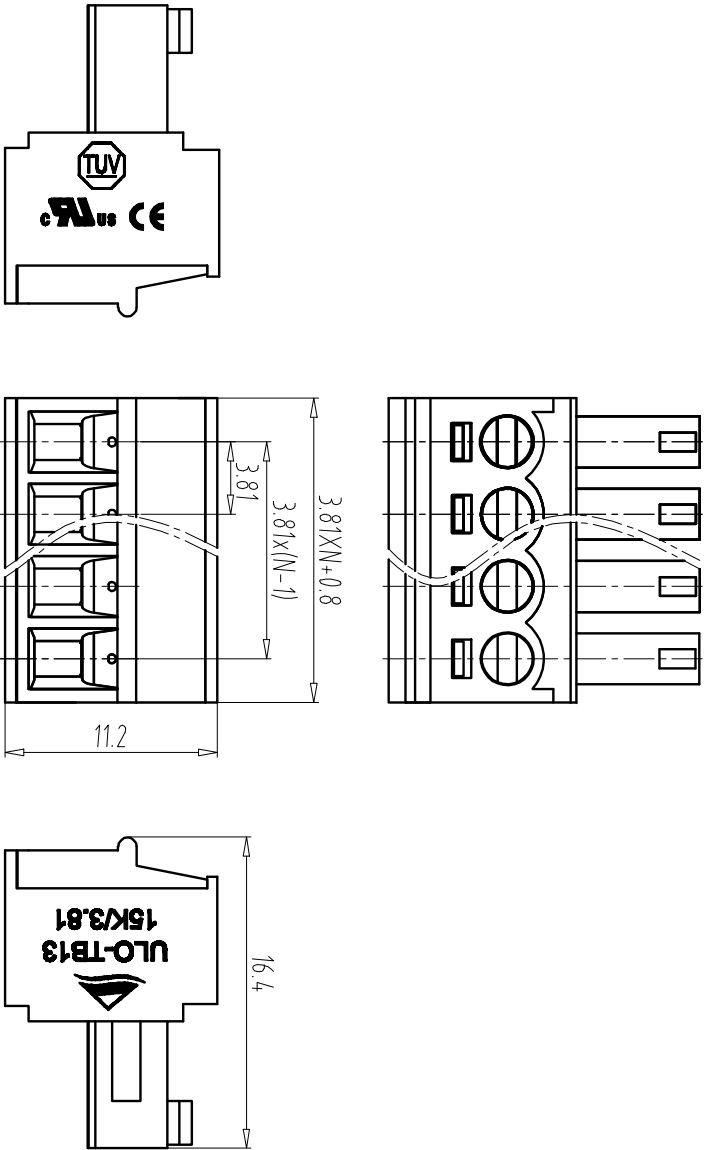

Total Pitch Tolerances		Nominal dimension range												—	//
in mm		in mm													

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70
6									5						

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.21	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB3-15K/3.81-XXP-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO.	UL0TB3Y000A	