

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES1:

UL Standard

1. Rating voltage/current: 300V/8A
2. Torque value: M2.5,3.5/Lb/in
3. Wire range: 28~16AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

2. Torque value: M2.5, 0.4Nm
3. wire range: 0.5-1.5mm²

NOTES2:

1. Housing: PA66(UL94V-0)
2. Cover: PA66(UL94V-0)
3. Clamp: Phosphor Bronze(Sn Plated)
4. Cage: Brass(Ni Plated)
5. Screw: Steel(Zn Plated)
6. Screw: Steel(Zn Plated)

NOTES3:

1. Pitch: 3.5mm Poles: 02~24P
2. Stripping length: 7mm
3. Operating temperature: -40℃~+105℃
4. RoHS Compliance


How to order

ULO-TB15 - 15KA/M381 - XXP - Y 0 0 0 A

Certificate
Series NO. Factory poles
Code Customer requirements

color:

- | | | |
|---------------|----------|---------|
| 1:Grey | 2:Blue | 3:Black |
| 4:Green | 5:Orange | 6:Red |
| 7:transparent | 8:Yellow | 9:white |

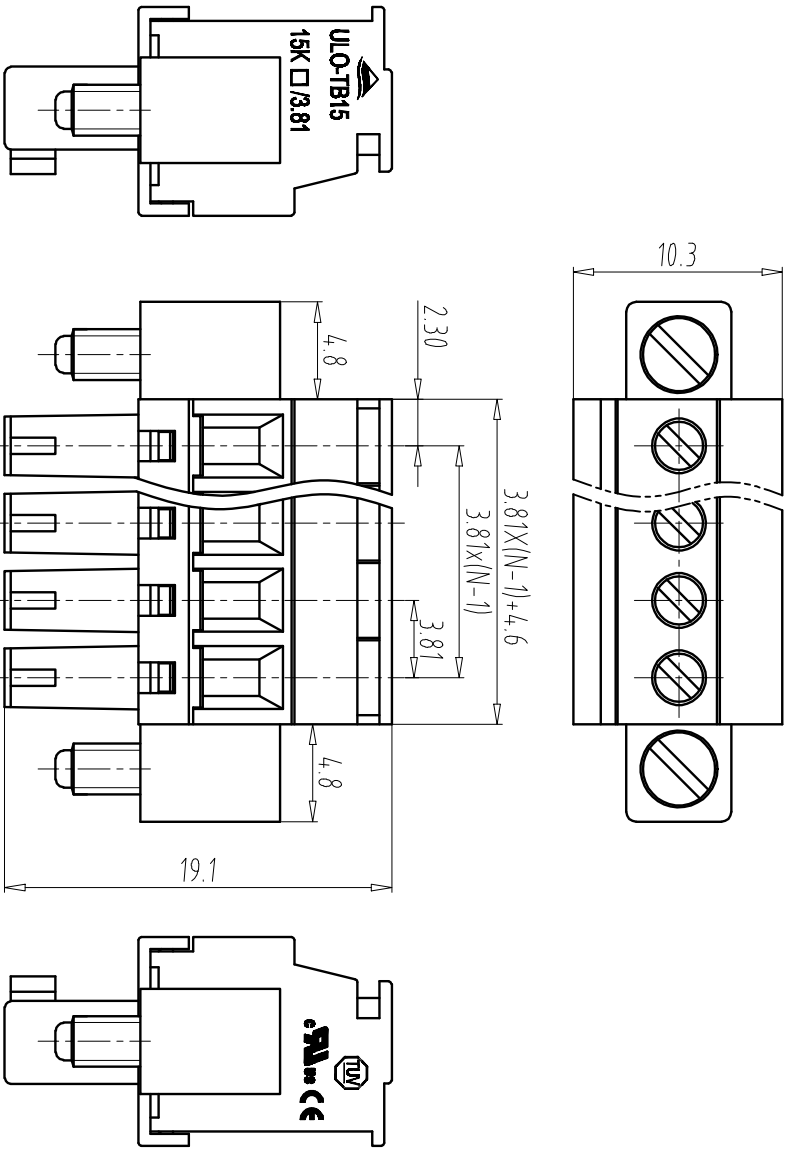

Total Pitch Tolerances										Nominal dimension range										—	//
in mm										in mm											

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	0	100
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	to	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.5
6										5										4	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.27	UNITS	MM
CHK.	DATE	SCALE	1 : 1	SHEET/OF	1/1
APP.	DATE	NAME	ULO-TB15-15KA/M381-XXP-Y000A		



NINGBO ULO ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNO: ULOTB15Y000A