

FILE: 2021-D01VULO

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

2.Wire range: 12~28AWG

IEC Standard

1.

Enclition Degree	1	2
Overvoltage Category	II	II
Rate Impulse Voltage(kV)	4.0kV	4.0kV
Rate Voltage(V)	320V	320V
Rate Current(A)	18A	18A

2. wire range: 1.0-2.5mm²

3. Torque value: M3, 0.5Nm

NOTES2:

1.Housing: PA66(UL94V-0)

2.Block: Brass(Ni Plated)

3.Clamp: Phosphor Bronze(Tin Plated)

4.Screw: Steel(M3.0,Zn Plated)

5.Cover: PA66(UL94V-0)

6.Screw: Steel(M2.5,Zn Plated)

NOTES3:

1.Pitch: 5.0mm Poles: 02-24P

2.Stripping length: 7mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

UL0-TB23 - 2KAM/5.0 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code




Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White

5:Orange

Total Pitch Tolerances		Nominal dimension range			

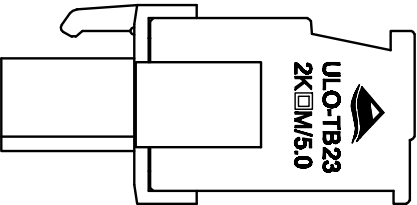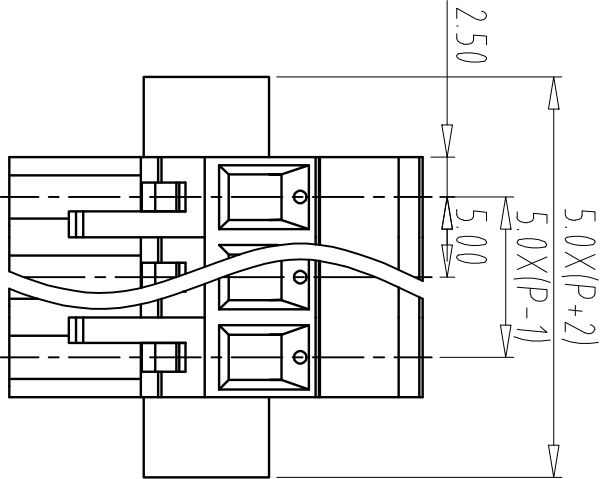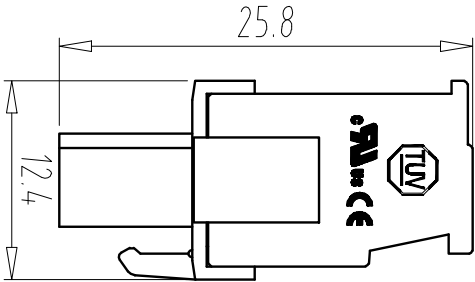

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.03	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB23-2KAM/5.0-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO., LTD.
宁波欧路电子有限公司

DWGNO. UL0TB23Y000A