

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 12~28AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	18A

2.wire range: 1.0-2.5mm²

3. Torque value: M3, 0.5Nm

NOTES2

1.Housing: PA66(UL94V-0)

2. Block: Brass (Ni Plated)

3.Clamp: Phosphor Bronze(Tin Plated)

4. Screw: Steel(M3.0,Zn Plated)

5.Cover: PA66(UL94V-0)

6. Screw: Steel(M2.5,Zn Plated)

NOTES3

1.Pitch: 5.0mm Poles: 02-24P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

How to order

ULO-TB29 - 2KBM/5.0 - XXP - Y 0 0 0 A




Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:White

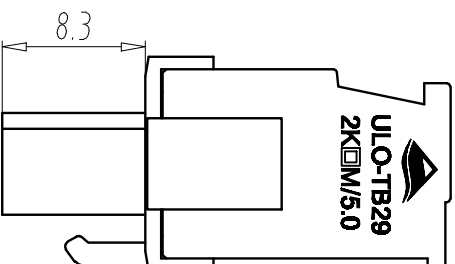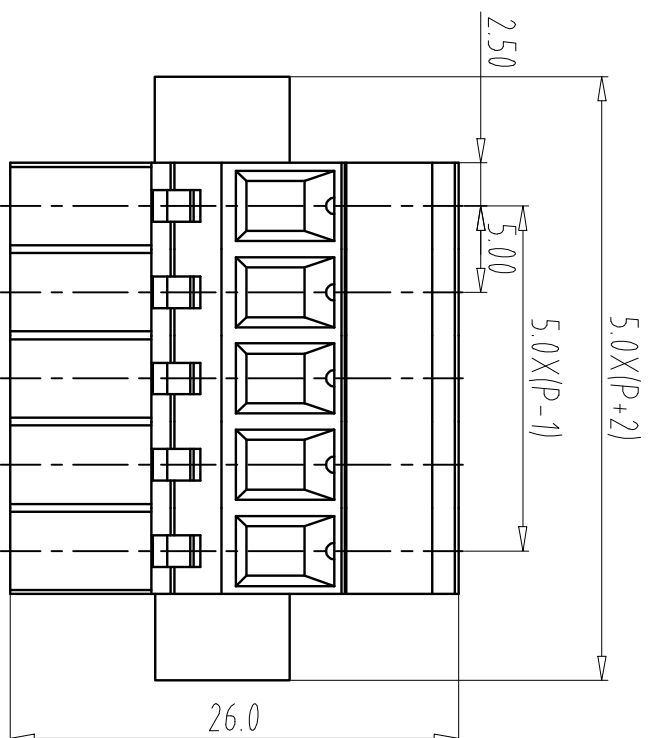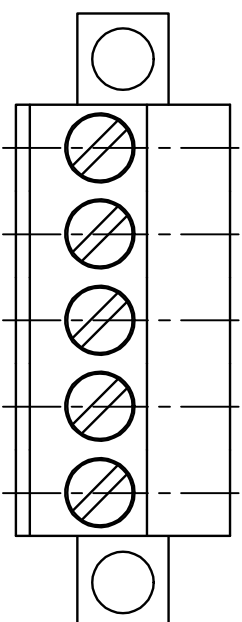

Total Pitch Tolerances in mm	Nominal dimension range in mm	$\bar{\bar{X}}$	$\bar{\bar{X}}$	$\bar{\bar{X}}$
A			—	//

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	LZW	DATE 20.05.03	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1:1	A4 
APP.	DATE				



NINGBO ULO ELECTRONICS CO.,LTD
宁波欧路电子有限公司

DWGNO.	UL0TB23Y000A
--------	--------------