

NOTES1:
UL Standard

1	Use group	B	C	D
	Rated Current	10A	10A	10A
	Rated Voltage	300V/150V	300V	

3. Wire range :28-16AWG

IEC Standard

1	Pollution Degree	2
	Overvoltage Category	III
	Rate Impulse Voltage(KV)	4.0KV
	Rate Voltage(V)	320V
	Rate Current(A)	20A

2. Wire range:0.2-2.5mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Cover:PA66(UL94V-0)
- 3.Cage:Brass(Ni Plated)
- 4.Clamp:Phosphor Brons(Ni Plated)
- 5.Screw:Steel(Zn Plated)
- 6.Screw:Steel(Zn Plated/M2.5)
- 7.Block: Steel(Zn Plated)

NOTES3:

- 1.Pitch: 5.0mm Poles: 02-24P
- 2.Stripping length: 10mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order


UL0-TB22 - 2KCM/5.0 - XXP - Y 0 0 0A

Certificate Factory poles
Series NO. Code

Customer
requirements

color:

- 1:Grey 2:Blue 3:Black
- 4:Green 5:Orange 6:Red
- 7:transparent 8:Yellow 9:White

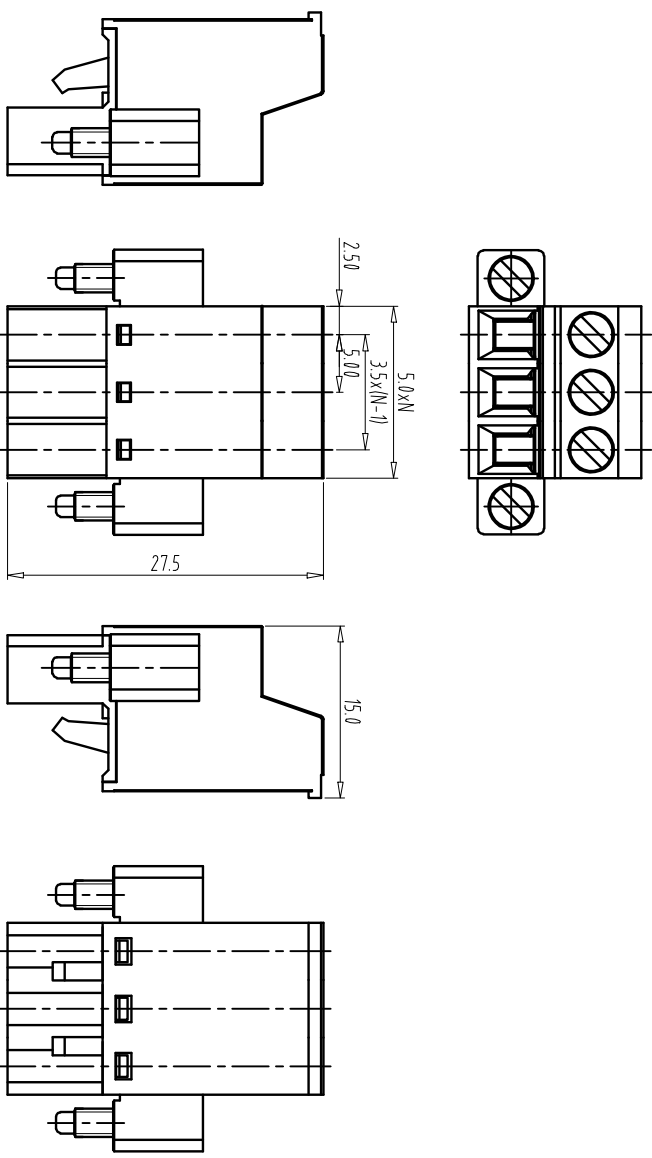

Total Pitch Tolerances												Nominal dimension range												—		=		//		
in mm												in mm																		
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	over	over	over	over	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	all	all	all	all	all	all	all	all	all	all	all
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	10	10	10	10	10	10	10	10	10	10	10	10
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.5	
6												5												4		3		2		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.29	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB22-2KCM/5.0-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO., LTD.
宁波欧路电子有限公司

DWGNO. UL0TB2Y000A