



FILE: 2021-D01VUL0

| REV | EC.N NO. | CONTENT | CHK | DATE |
|-----|----------|---------|-----|------|
|-----|----------|---------|-----|------|

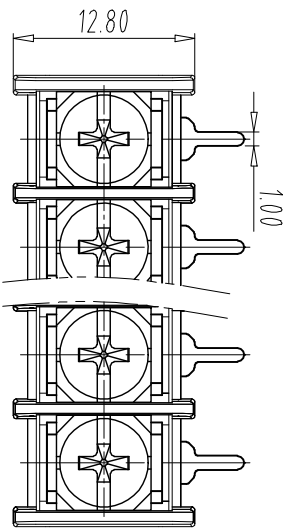

NOTES1:

UL Standard

1.

| Use group     | B    | C    | D    |
|---------------|------|------|------|
| Rated Current | 15A  | 15A  | 10A  |
| Rated Voltage | 300V | 300V | 300V |

2 Wire range: 14~22AWG

IEC Standard

1.

| Pollution Degree          | 2     |
|---------------------------|-------|
| Overvoltage Category      | II    |
| Rated Impulse Voltage(kV) | 2.5kV |
| Rate Voltage(V)           | 300V  |
| Rate Current(A)           | 24A   |

2 Wire range: 0.5-2.5mm<sup>2</sup>

NOTES2:

1.Housing: PA66(UL94V-0)

2.Screw: Steel(M3/Ni Plated)

3.Solder Pin: Brass(Tin Plated)

NOTES3:

1.Pitch: 7.62mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order




ULO-TB44 - 2SR/B - XXP - Y 10 0 A

Certificate Factory poles  
Series NO. Code

Customer requirements

color:

- 1:Grey
- 2:Blue
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:White

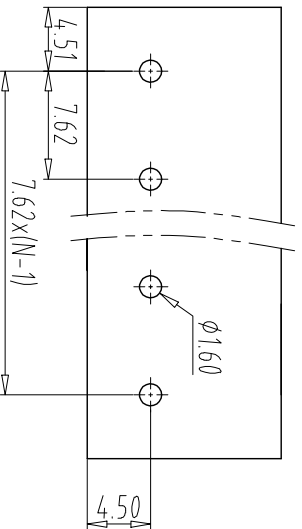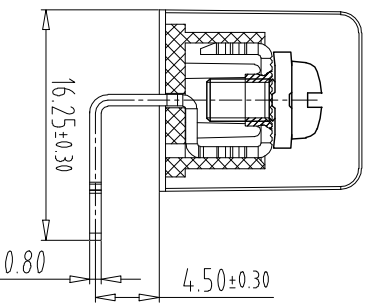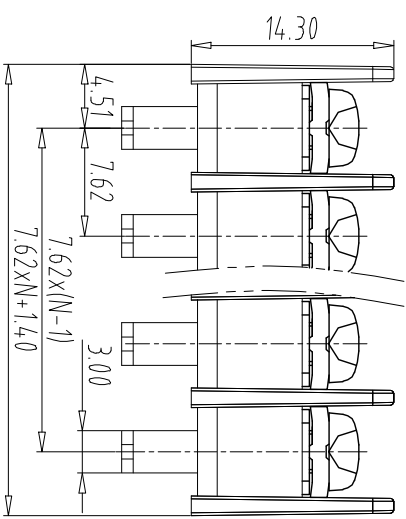

Pcb Layout

| Total Pitch Tolerances |       | Nominal dimension range |       |       |       |       |       |       |       |
|------------------------|-------|-------------------------|-------|-------|-------|-------|-------|-------|-------|
| in mm                  |       | in mm                   |       |       |       |       |       |       |       |
| over                   | over  | over                    | over  | over  | over  | over  | over  | over  | over  |
| 0                      | 30    | 53                      | 70    | 90    | 115   | 150   | 200   | 250   | 0     |
| to                     | to    | to                      | to    | to    | to    | to    | to    | to    | to    |
| 30                     | 53    | 70                      | 90    | 115   | 150   | 200   | 250   | 320   | 30    |
| ±0.18                  | ±0.20 | ±0.25                   | ±0.3  | ±0.35 | ±0.44 | ±0.55 | ±0.70 | ±0.75 | ±0.20 |
| ±0.25                  | ±0.3  | ±0.35                   | ±0.44 | ±0.55 | ±0.70 | ±0.75 | ±0.80 | ±0.90 | 0.2   |
| 0.2                    | 0.3   | 0.3                     | 0.3   | 0.3   | 0.3   | 0.3   | 0.3   | 0.3   | 0.5   |

| ITEM | NAME OF PART | NO. OF PART | Q'TY | MATERIAL | NOTE |
|------|--------------|-------------|------|----------|------|
|------|--------------|-------------|------|----------|------|

|      |     |      |          |       |     |
|------|-----|------|----------|-------|-----|
| DWG. | LZW | DATE | 21.12.09 | UNITS | MM  |
| CHK. |     | DATE |          | SCALE | 1:1 |
| APP. |     | DATE |          |       | A4  |

|      |                          |
|------|--------------------------|
| NAME | ULO-TB44-2SR/B-XXP-Y100A |
|------|--------------------------|

|        |              |
|--------|--------------|
| DWGNO. | UL0TB44Y100A |
|--------|--------------|



NINGBO ULO ELECTRONICS CO.,LTD.