
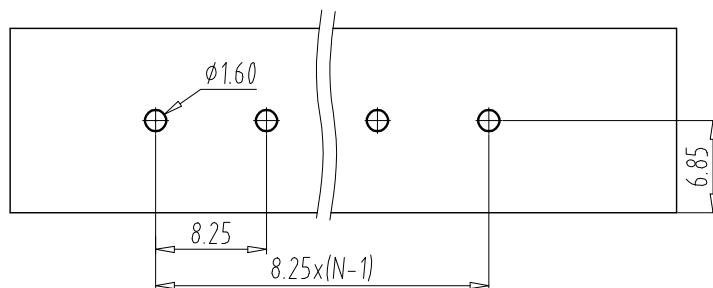

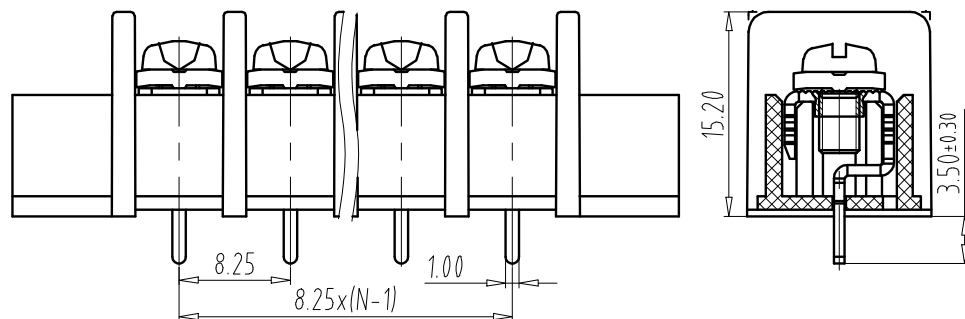


FILE: 2021-D01\ULO

REV	E.C.N NO.	CONTENT	CHK	DATE

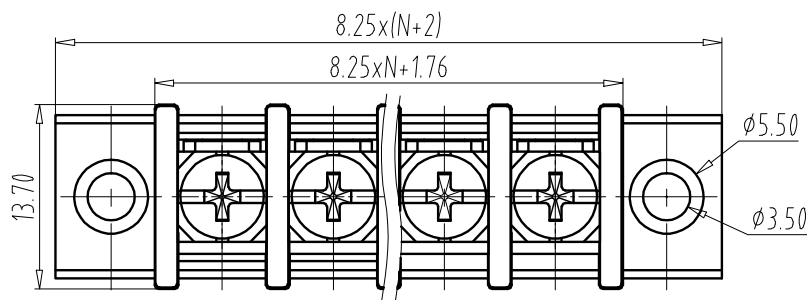

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300V

2.Wire range: 12~22AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	6.0KV
Rate Voltage(V)	320V
Rate Current(A)	24A

2.Wire range: 0.5~2.5mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Screw: Steel(M3/Ni Plated)

3.Solder Pin: Brass(Tin Plated)

NOTES3:

1.Pitch: 8.25mm Poles: 02~24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

ULO-TB43 - 35C/A - XXP - Y 100A

Certificate Series NO. Factory Code poles Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$	$—$ //			
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 0	over 10	all	over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10				to 100	to 100	to 150
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.06.15	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE			ULO-TB43-35C/A-XXP-Y100A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				NAME				
				DWGN0.	ULOTB43Y100A			