
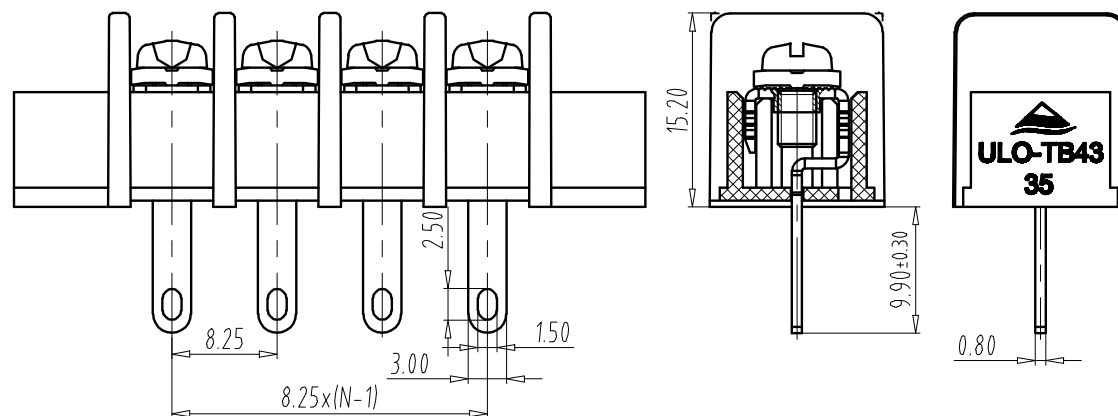


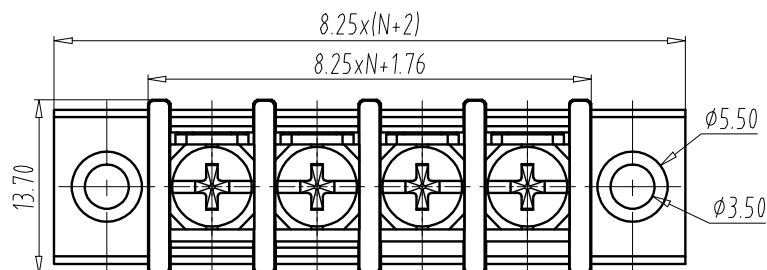

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300V

2.Wire range: 12~22AWG

IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	250V
Rate Current(A)	24A

2.Wire range: 0.5-2.5mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
2.Screw: Steel(M3/Ni Plated)
3.Solder Pin: Brass(Tin Plated)

NOTES3:

- 1.Pitch: 8.25mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order

ULO-TB43 - 35H/A - XXP - Y 100 A

Certificate Series NO.	Factory Code	poles	Customer requirements
---------------------------	-----------------	-------	--------------------------

— color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.06.15	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-TB43-35H/A-XXP-Y100A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					DWGNO.	ULOTB43Y100A		