

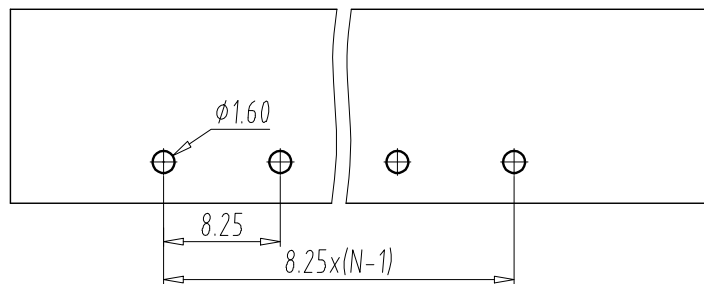
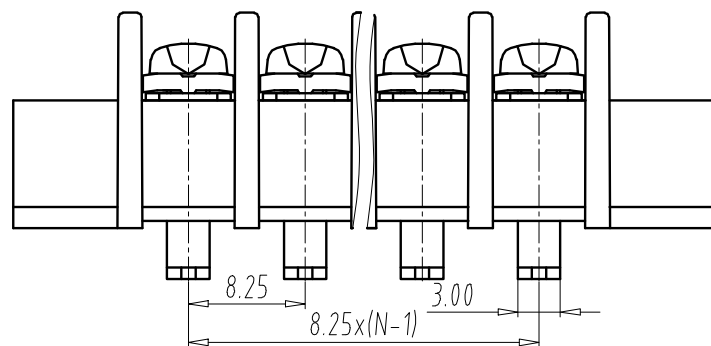


FILE: 2021-D01VUL0

REV	E.C.N NO.	CONTENT	CHK	DATE

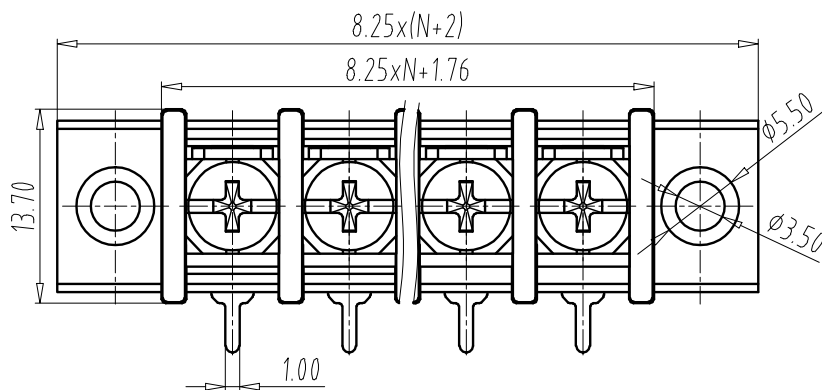

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	20A	-	10A
Rated Voltage	300V	-	300V

2.Wire range: 12~22AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	250V
Rate Current(A)	24A

2.Wire range: 0.5-2.5mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Screw: Steel(M3/Ni Plated)

3.Solder Pin: Brass(Tin Plated)

NOTES3:

1.Pitch: 8.25mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

ULO-TB43 - 35R/A - XXP - Y 100A

Certificate
Series NO.

Factory
Code

poles

Customer
requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.06.16	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-TB43-35R/A-XXP-Y100A		
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.	ULOTB43Y100A	



宁波欧路电子有限公司