
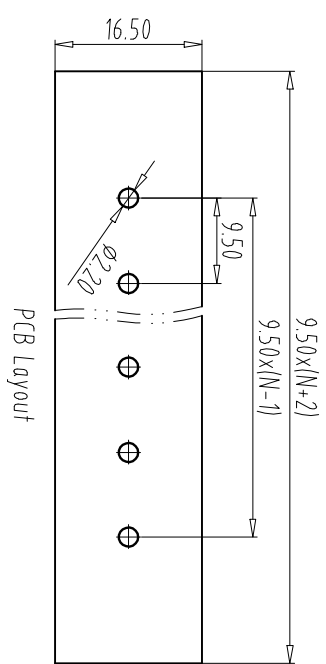
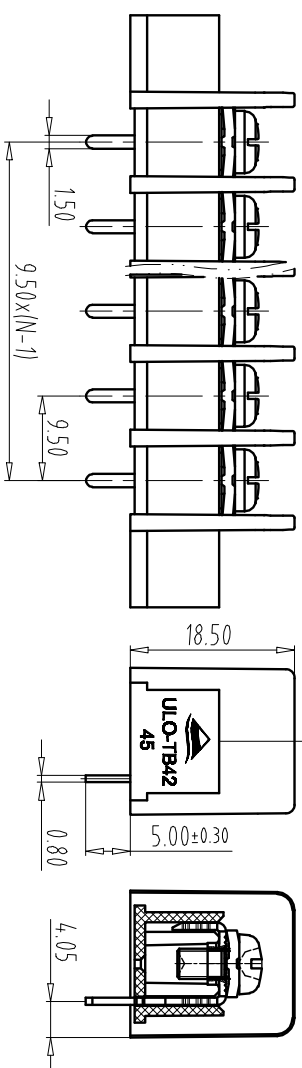


FILE: 2021-D01VUL0

REV EC.N NO.

CONTENT

CHK DATE

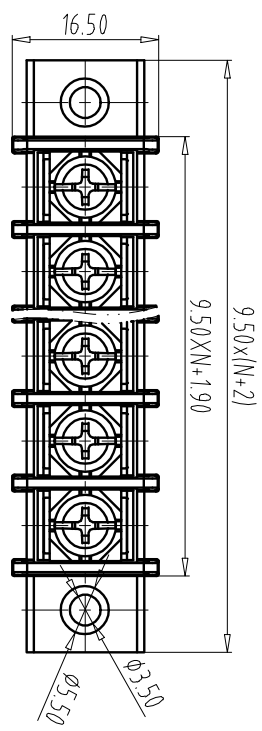

NOTES:
UL Standard

1.	Use group	B	C	D
	Rated Current	20A	-	10A
	Rated Voltage	300V	-	300V
2.	Wire range:	12~22AWG		

1.	IEC Standard
2.	Wire range: 0.5-4.0mm ²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(INI Plated)
- 3.Solder Pin: Brass(Tin Plated)

NOTES3:

- 1.Pitch: 9.5mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order
ULO-TB42 - 45R/B - XXP - Y 100A
Certificate Factory poles
Series NO. Code

Customer requirements
color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

Total Pitch Tolerances		Nominal dimension range							
in mm	over	in mm	over	in mm	over	in mm	over	in mm	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	300	320	10
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20
±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35
±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55
±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70
±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80
±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.06.15	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-TB42-45R/B-XXP-Y100A		
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.	UL0TB42Y100A	