

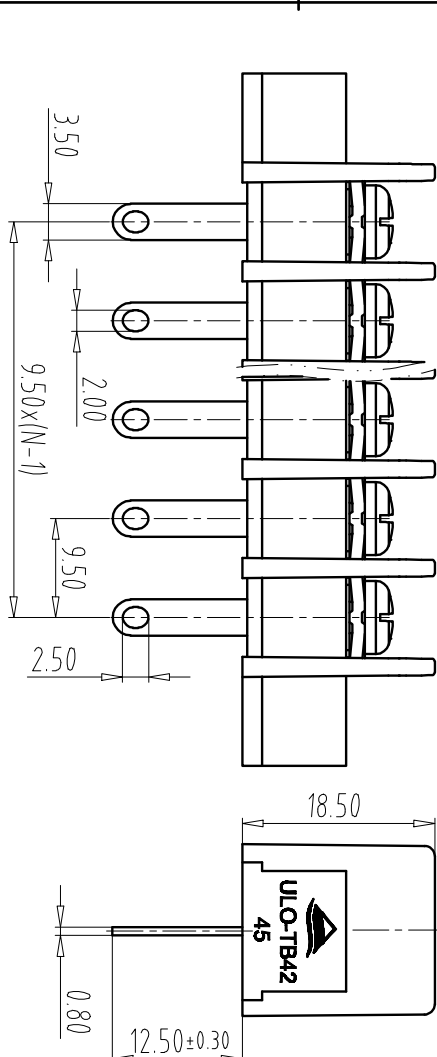


FILE: 2021-D01VUL0

REV EC.N NO.

CONTENT

CHK DATE

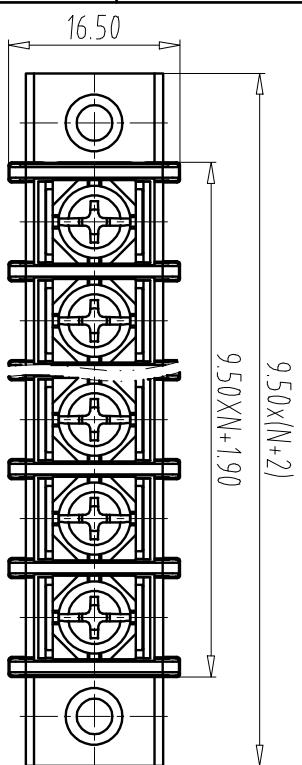

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	20A	-	10A
Rated Voltage	300V	-	300V

2.Wire range: 12~22AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rated Impulse Voltage(kV)	4.0kV
Rated Voltage(V)	250V
Rated current(A)	24A

2.Wire range: 0.5-4.0mm²

NOTES2:

1.Housing: PA66(UL94-V-0)

2.Screw: Steel(INI Plated)

3.Solder Pin: Brass(Tin Plated)

NOTES3:

1.Pitch: 9.5mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

UL0-TB42 - 45H/A - XXP - Y 100A

Certificate Factory poles
Series NO. Code
Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

Total Pitch Tolerances		Nominal dimension range		T		=		-		//	
over	in mm	over	in mm	over	in mm	over	in mm	over	in mm	over	in mm
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.06.11	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-TB42-45H/A-XXP-Y100A		
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO.	UL0TB42Y100A