

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

- 1

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 12~22AWG

IEC Standard

- 1

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	8.0KV
Rate Voltage(V)	320V
Rate Current(A)	32A

2. Wire range: 0.5-4.0mm²

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(Ni Plated)
- 3.Solder Pin: Brass(Tin Plated)

NOTES3

- 1.Pitch: 10mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order





UL0-TB41 - 55C/B - XXP - Y 100A

Certificate Series NO.	Factory Code	poles

Customer requirements

—color:

- 1:Grey
2:Blue
3:Black
4:Green
5:Orange
6:Red
7:transparent
8:Yellow
9:White

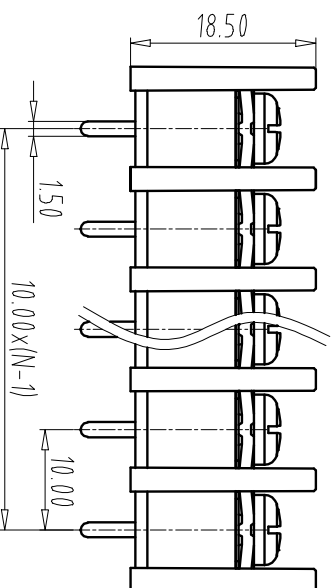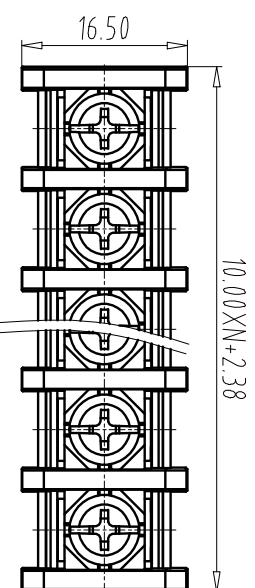

Total Pitch Tolerances	Nominal dimension range	=	—	//
------------------------	-------------------------	---	---	----

over		over		in		in		over		over		over		over		over	
over		over		in		in		over		over		over		over		over	
over		over		in		in		over		over		over		over		over	
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	300	30	53	70	90	115	150	200	250	300
0.18	0.20	0.25	0.3	0.35	0.44	0.55	0.70	0.75	0.20	0.25	0.30	0.35	0.44	0.55	0.70	0.80	0.90
0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.2	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.2

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	LZw	DATE	21.05.31	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1 : 1	A4
APP.		DATE				
				NAME	UL0-TB41-55C/B-XRP-Y100A	
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWG/NO.	UL0TB41Y000A	