

2		1	
REV	E.C.N. NO.	CONTENT	CHK DATE

NOTES:

UL Standard

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300

2.Wire range: 12~22AWG

IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	8.0k
Rate Voltage(V)	320V
Rate Current(A)	32A

2. Wire range: 0.5-4.0mm²

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(Ni Plated)
- 3.Solder Pin: Brass(Tin Plated)

NOTES:

1. Pitch: 10mm Poles: 02-24P
2. Operating temperature: -40°C ~ +105°C
3. RoHS Compliance


How to order

UL0-TB41 - 55S/B - XXP - Y 100A

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

_____ color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

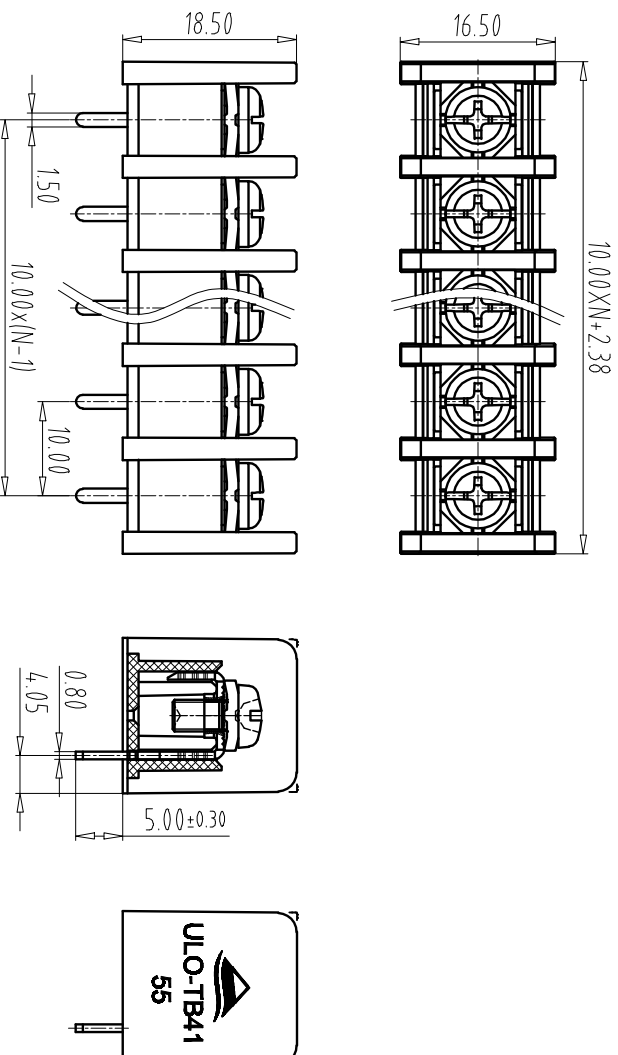

		Total Pitch Tolerances						Nominal dimension range										
		in mm						in mm										
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10
+0.18 ± 0.20	+0.25 ± 0.3	+0.35 ± 0.44	+0.55 ± 0.70	+0.75 ± 0.20	+0.25 ± 0.30	+0.35 ± 0.44	+0.55 ± 0.70	+0.80 ± 0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.5	0.5	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZw	DATE 21.06.11	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1 : 1	A4
APP.	DATE				
NINGBO ULIO ELECTRONICS CO.,LTD.			ULIO-B44-55S/B-XXP-Y100A		
宁波欧路电子有限公司			ULIOB44Y100A		