

FILE: 2021-D01VULO

REV





ECN NO.

CONTENT

CHK

DATE

10.00XN+2.38

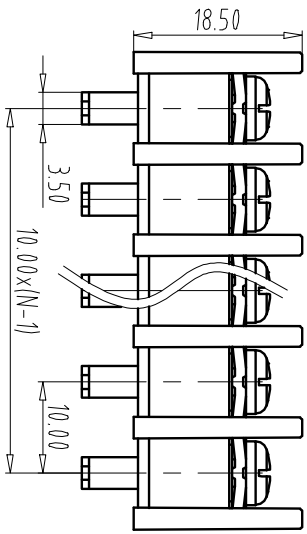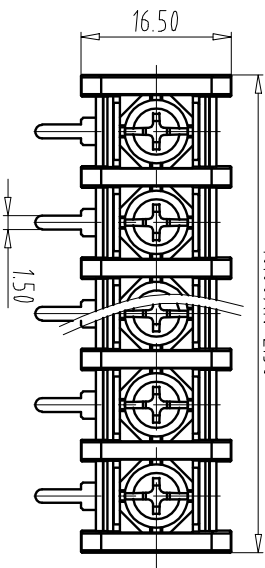

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 12~22AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	6.0kV
Rate Voltage(V)	320V
Rate Current(A)	32A

2. Wire range: 0.5~4.0mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Screw: Steel(INI Plated)

3.Solder Pin: Brass(Tin Plated)

NOTES3:

1.Pitch: 10mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

ULO-TB41 - 55R/B - XXP - Y 1 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

Total Pitch Tolerances

Nominal dimension range

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//

in mm

in mm

—

≡

—

//