


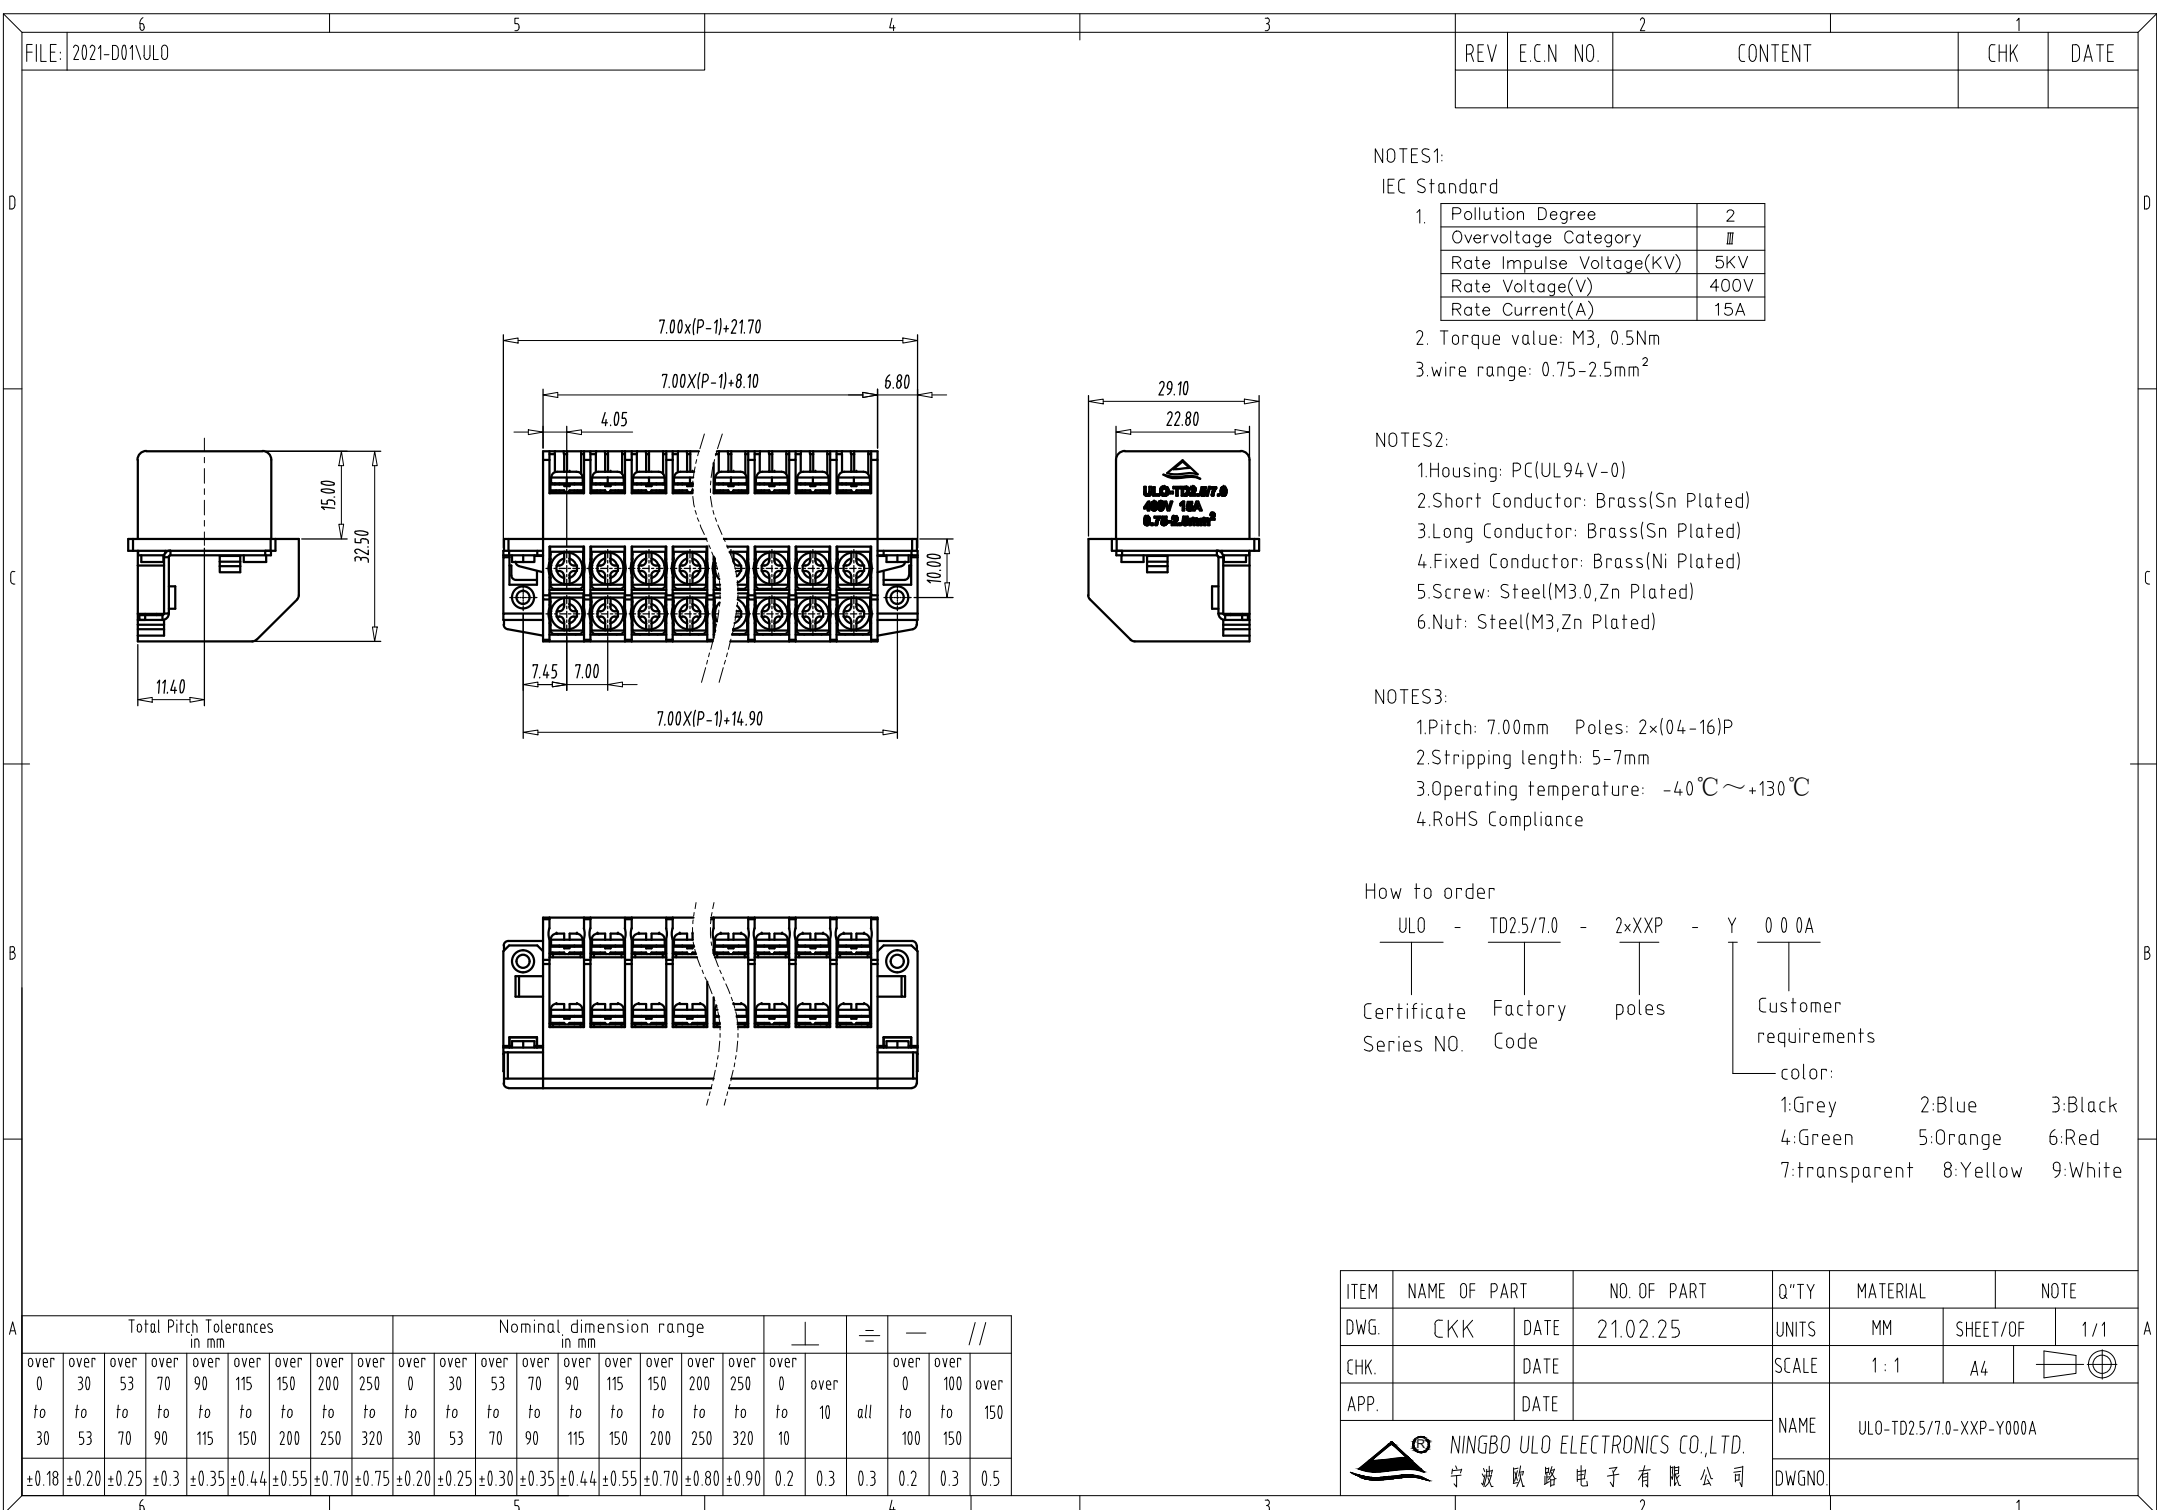

6						5						4						3						2						1					
FILE: 2021-D01VULO																								REV						E.C.N NO.					
																														CONTENT					
																														CHK					
																														DATE					

NOTES1:

IEC Standard

1.	Pollution Degree	2
	Overvoltage Category	III
	Rate Impulse Voltage(KV)	5KV
	Rate Voltage(V)	400V
	Rate Current(A)	15A

2. Torque value: M3, 0.5Nm

3.wire range: 0.75-2.5mm²

NOTES2:

1.Housing: PC(UL94 V-0)

2.Short Conductor: Brass(Sn Plated)

3.Long Conductor: Brass(Sn Plated)

4.Fixed Conductor: Brass(Ni Plated)

5.Screw: Steel(M3.0,Zn Plated)

6.Nut: Steel(M3,Zn Plated)

NOTES3:

1.Pitch: 7.00mm Poles: 2x(04-16)P

2.Stripping length: 5-7mm

3.Operating temperature: -40℃~+130℃

4.RoHS Compliance

How to order

ULO - TD2.5/7.0 - 2xXXP - Y 0 0 0A

Certificate Series NO. Factory Code poles Customer requirements color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:White

ITEM				NAME OF PART				NO. OF PART				Q"TY				MATERIAL				NOTE			
DWG.				CKK				DATE				UNITS				MM				SHEET/OF			
CHK.								DATE				SCALE				1:1				A4			
APP.								DATE								NAME				ULO-TD2.5/7.0-XXP-Y000A			
																DWGNO							

NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司