

FILE: 2020-D01VUL0							
REV		EC.N NO.		CONTENT		CHK	
						DATE	

NOTES1:

UL Standard

1. Rating voltage/current: 300V/10A

2. Wire range: 24~18AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	1.25KV
Rate Voltage(V)	130V
Rate Current(A)	10A

2. wire range: 0.5-1.0mm²

3. Torque value: M2, 0.2Nm

NOTES2:

1.Housing(2P): PA66(UL94V-0)

2.Housing(3P): PA66(UL94V-0)

3.Cage: Brass(5n Plated)

4.Spring: Stainless Steel

5.Screw:Steel(Zn Plated/M2.0)

NOTES3:

1.Pitch: 350mm Poles: 02-24P

2.Stripping length: 5mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

UL0-TB11 - 350R/35 - XXP - Y 0 0 0A





Certificate Factory poles Customer requirements
Series NO. Code

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:white

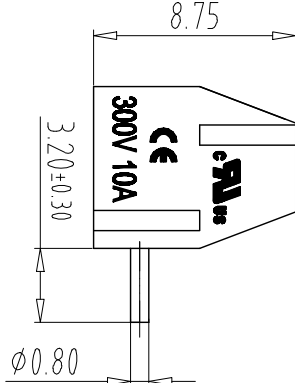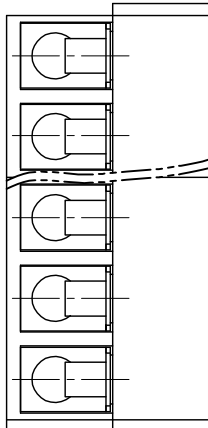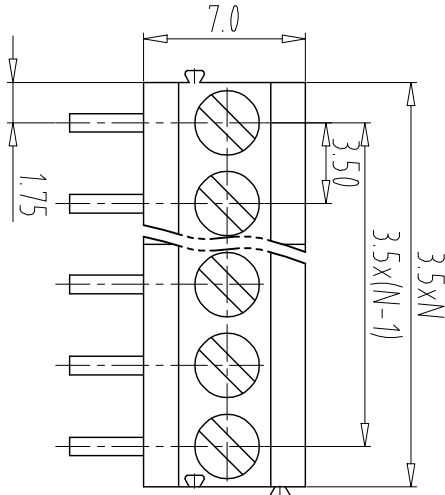

Total Pitch Tolerances		Nominal dimension range					
in mm		in mm					
over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200
to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250
to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320
to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70
±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3
0.2	0.3	0.3	0.2	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.02.21	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-TB11-350R/35-XXP-Y000A		

