


FILE: 2021-D01VUL0					
REV	E.C.N NO.	CONTENT	CHK	DATE	

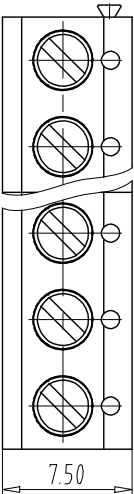

- NOTES1:
UL Standard
1. Rating voltage/current: 300V/15A
2. Wire range: 22~14AWG
IEC Standard
1.
- | | |
|--------------------------|-------|
| Pollution Degree | 2 |
| Overvoltage Category | II |
| Rate Impulse Voltage(kV) | 4kV |
| Rate Voltage(V) | 250V |
| Rate Current(A) | 17.5A |
2. wire range: 0.75~1.5mm²

NOTES2:

- 1.Housing(2P): PA66(UL94V-0)
2.Housing(3P): PA66(UL94V-0)
3.Solder Pin: Brass(Tin Plated)
4.Screw: Steel(Zn Plated)

NOTES3:

- 1.Pitch: 5.0mm Poles: 02-24P
2.Stripping length: 6mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order





UL0-TB25 - 30T/5.0 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

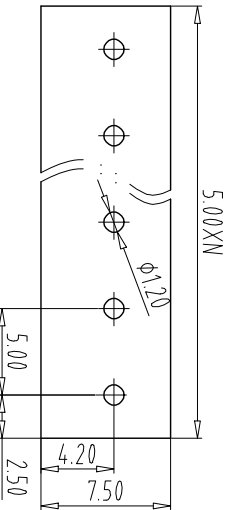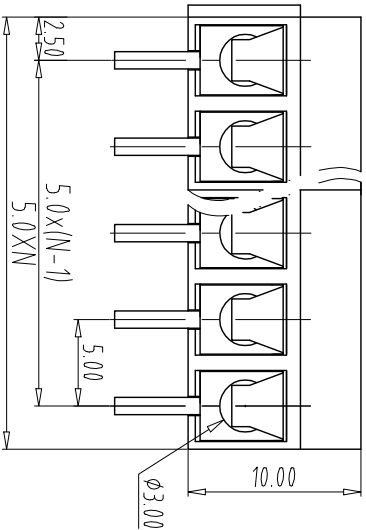

PCB LAYOUT

Total Pitch Tolerances		Nominal dimension range							
in mm		in mm							
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	0
to	to	to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320	10	all
to	to	to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90
6	6	6	6	6	6	6	6	6	6

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.27	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	A4
APP.	DATE	NAME	UL0-TB25-30T/5.0-XXP-Y000A		1/1



NINGBO UL0 ELECTRONICS CO., LTD.

DWGNO: UL0TB25Y000A