

2		1	
REV	E.C.N NO.	CONTENT	CHK DATE

NOTES:

UL Standard

Use group	B	C	D
Rated Current	10A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 22~14AWG

IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	4kV
Rate Voltage(V)	250V
Rate Current(A)	24A

2.wire range: 1.0-2.5mm²

NOTES:

- 1.Housing(2P): PA66(UL94V-0)
- 2.Housing(3P): PA66(UL94V-0)
- 3.Solder Pin: Brass(Tin Plated)
- 4.Screw: Steel(Zn Plated)

NOTES:

- 1.Pitch: 5.0mm Poles: 02-24P
2.Stripping length: 6mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance
- How to order

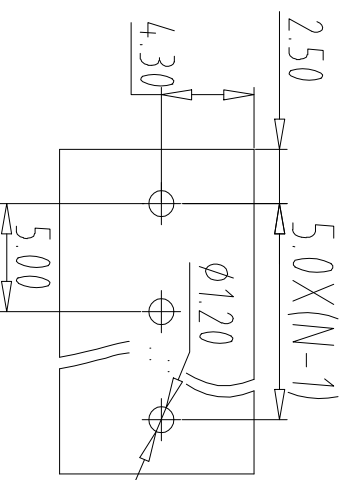
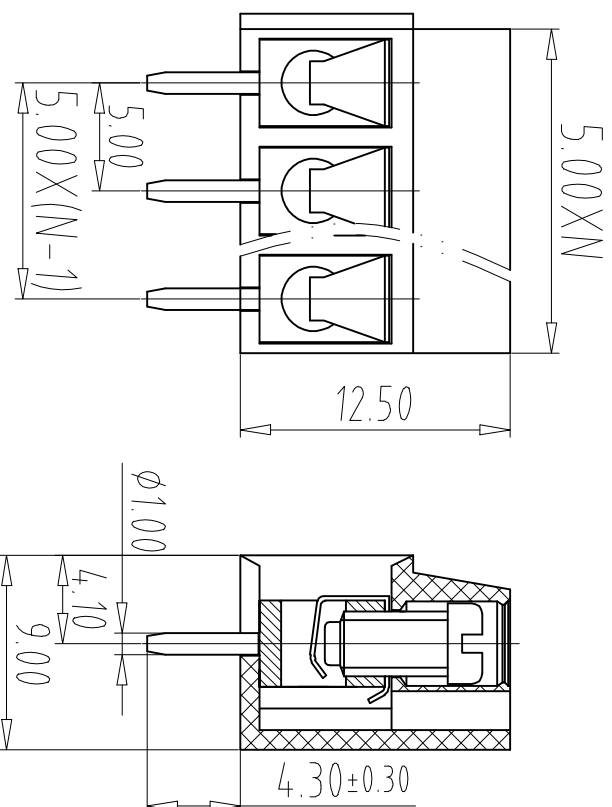
How to order

UL0-TB25 - 300/5.0 - XXP - Y 0000A

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	LZW	DATE 21.06.01	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1 : 1	A4
APP.		DATE	NAME	ULD-B25-30W/5.0-XXP-Y000A	
 NINGBO ULO ELECTRONICS CO.,LTD 宁波欧路电子有限公司			DWGNO: ULD-B25-Y000A		