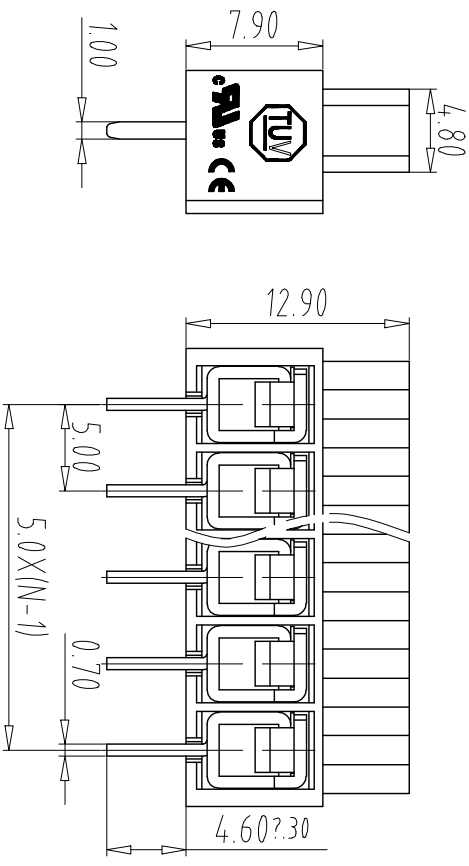
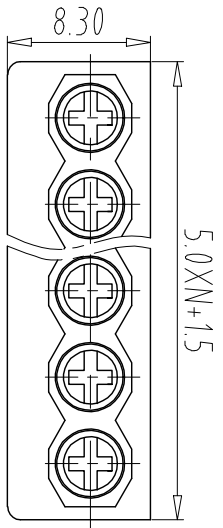


NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

2. Wire range: 22~12AWG

IEC Standard

1.

Insulation Degree	2
Overvoltage Category	2
Rated Insulation Voltage(U _i)	4.0kV
Rated Voltage(U _r)	250V
Rated Current(I _a)	22A

2. wire range: 10-2.5mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Spring: Stainless Steel
- 3.Solder Pin: Brass(Tin Plated)
- 4.Screw: Steel(Zn Plated)

NOTES3:

- 1.Pitch: 5.0mm Poles: 02-24P
- 2.Stripping length: 7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

ULO-TB25 - 166/5.0 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey
- 2:Blue
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:White

Total Pitch Tolerances										Nominal dimension range										⊥	≡	—	//
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over				
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10		100	to	150	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5
6										5										4			