


FILE: 2020-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE

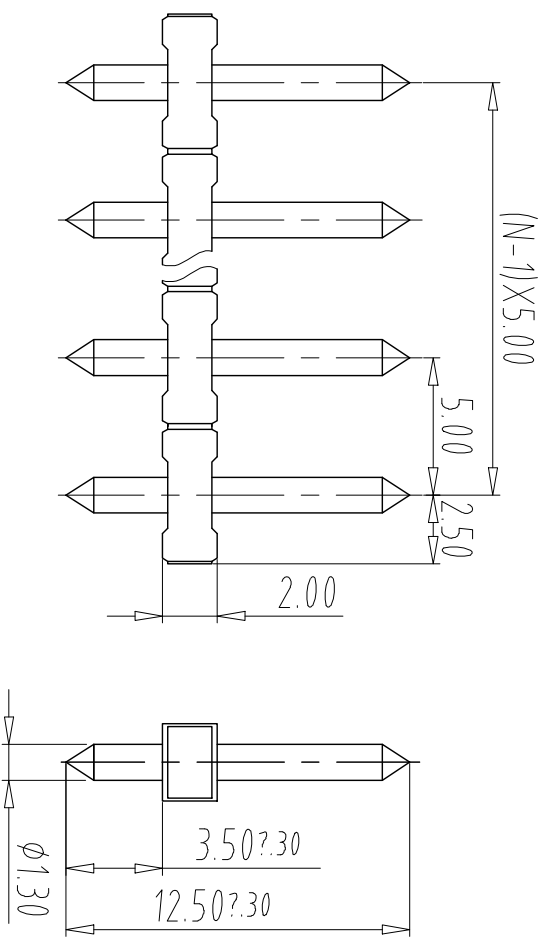

NOTES1:
UL Standard


Use group	B	C	D
Rated Current	10A	—	—
Rated Voltage	250V	—	—

IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	250V
Rate Current(A)	12A

NOTES2:
1.Housing: PA6(UL94V-0)
2.Pin: Brass(Tin Plated)

NOTES3:
1.Pitch: 5.0mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

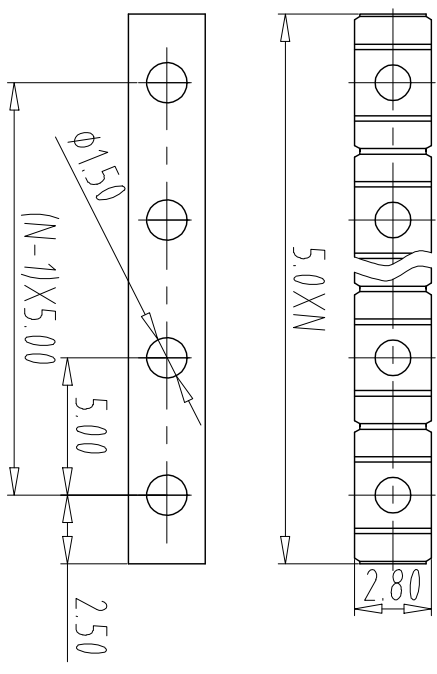

PCB.LAYOUT

Total Pitch Tolerances												Nominal dimension range												⊥	≡	—	//
in mm												in mm															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over								
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10		100	150						
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5				

NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG. LZW	DATE 21.04.23	UNITS	MM	SHEET/OF 1/1
CHK.	DATE	SCALE	1:1	A4
APP.	DATE	NAME	UL0-TB11-332J/5.0-XP-Y000A	
NINGBO UL0 ELECTRONICS CO.,LTD.		DWGNO.	UL0TB11Y000A	