

FILE: 2020-D01VUL0									
REV		EC.N NO.		CONTENT		CHK		DATE	

NOTES1:

UL Standard

1. Rating voltage/current: 300V/10A

2. Wire range:28-16AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2KV
Rate Voltage(V)	250V
Rate Current(A)	12A

2. Wire range: 0.2-15mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Cage: Brass(Ni Plated)

3.Springcoil: Phosphor Bronze(Sn Plated)

4.Screw: Steel(M2/Zn Plated)

NOTES3:

1.Pitch: 5.0mm Poles: 02-24P

2.Stripping length: 6mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

UL0-TB71 - 332K/5.0 - XXP - Y 0 0 0A




Certificate Factory poles Customer requirements
Series NO. Code

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:white

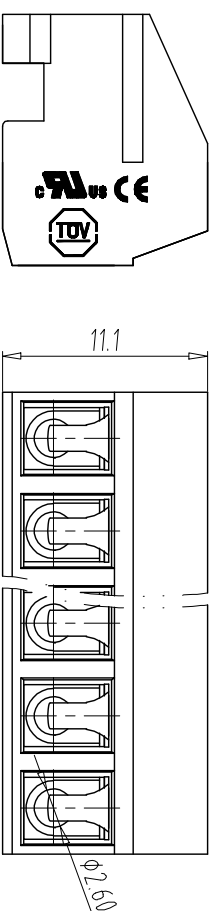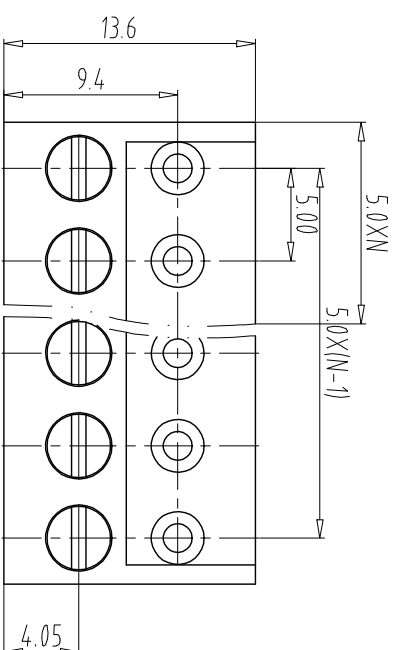

Total Pitch Tolerances		Nominal dimension range		T		=		—		//	
in mm		in mm									

over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3
0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5

NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG. LZW	DATE 21.04.23	UNITS	MM	SHEET/OF 1/1
CHK.	DATE	SCALE	1:1	A4
APP.	DATE	NAME	UL0-TB71-332K/5.0-XXP-Y000A	
NINGBO UL0 ELECTRONICS CO.,LTD.		DWGNO.	UL0TB7Y000A	