



FILE: 2020-D01VUL0					
REV		EC.N NO.		CONTENT	
				CHK	DATE

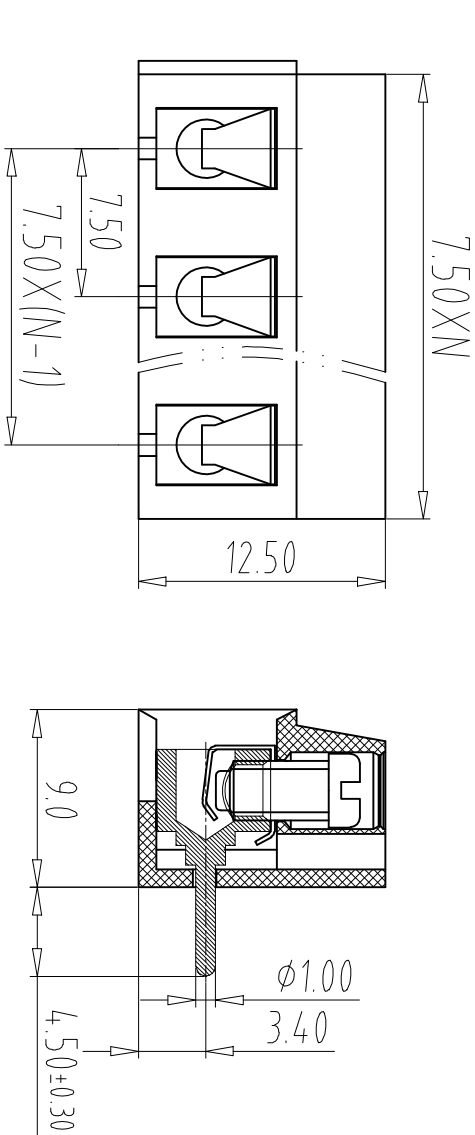

NOTES1:
UL Standard
1. Use group B C D
Rated Current 10A - 10A
Rated Voltage 300V - 300V
2. Wire range: 22~14AWG
IEC Standard
1.

NOTES2:
1.Housing: PA66(UL94V-0)
2.Screw:Steel(M2.5/Zn Plated)
3.Spring: Brass(Tin Plated)
4.Block: Brass(Ni Plated)

NOTES3:
1.Pitch: 7.5mm Poles: 02-24P
2.Stripping length: 6mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

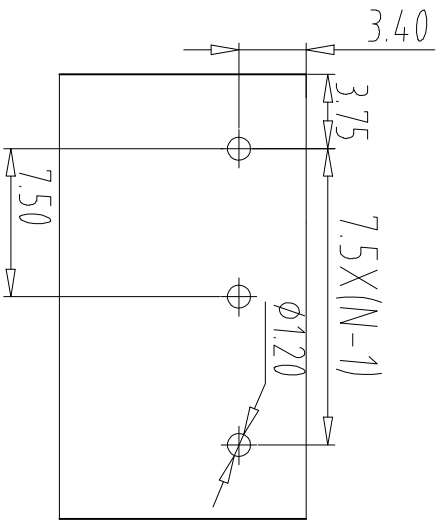

How to order
UL0-TB37 - 300R/7.5 - XXP - Y 0 0 0A
Certificate Factory poles
Series NO. Code Customer requirements
color:
1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:white

A		Total Pitch Tolerances										Nominal dimension range										T		=		//							
		in mm										in mm																					
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	over	over	over	over	over	over	over	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	to	to	to	to	to	to	to	to	to	to	to	to	to	to
+0.18 ± 0.20 ± 0.25 ± 0.3 ± 0.35 ± 0.44 ± 0.55 ± 0.70 ± 0.75 ± 0.20 ± 0.25 ± 0.30 ± 0.35 ± 0.44 ± 0.55 ± 0.70 ± 0.80 ± 0.90		0.2		0.3		0.3		0.3		0.2		0.3		0.3		0.5																	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.23	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB37-300R/7.5-XXP-Y000A		
				DWGNO.	UL0TB37Y000A