

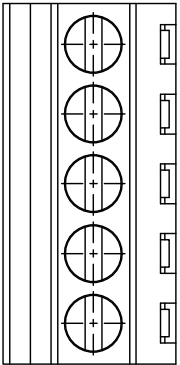
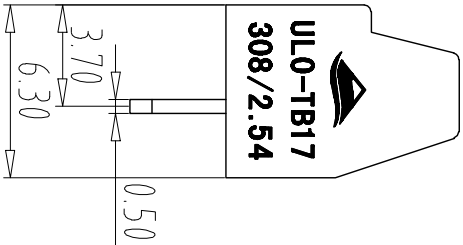


FILE: 2020-D01VUL0					
REV	EC.N NO.	CONTENT		CHK	DATE

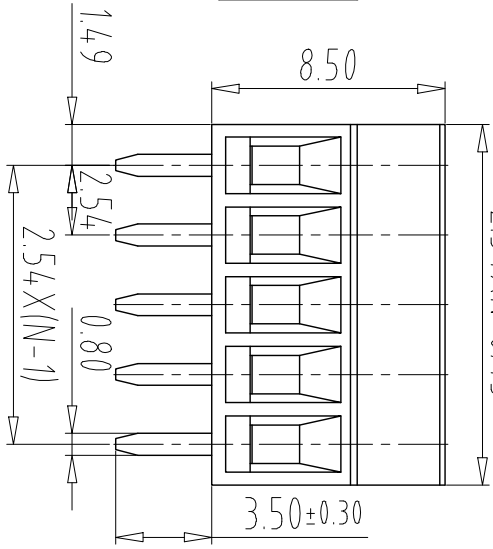

2.54XN+0.43



- NOTES1:
- UL Standard
1. Rating voltage/current: 150V/6A
2. Wire range:18-26AWG
- IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	1.5kV
Rate Voltage(V)	180V
Rate Current(A)	3A

2. Wire range:0.5-1.0mm²

- NOTES2:
- 1.Housing: PA66(UL94V-0)
- 2.Screw:Steel(M2.5/Zn Plated)
- 3.Speing: Brass(Tin Plated)
- 4.Block: Brass(INi Plated)

- NOTES3:
- 1.Pitch: 2.54mm Poles: 02-24P
- 2.Stripping length: 4mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

UL0-TB17 - 308/254 - XXP - Y 0 0 0A


Certificate Series NO. Factory Code poles Customer requirements

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:White

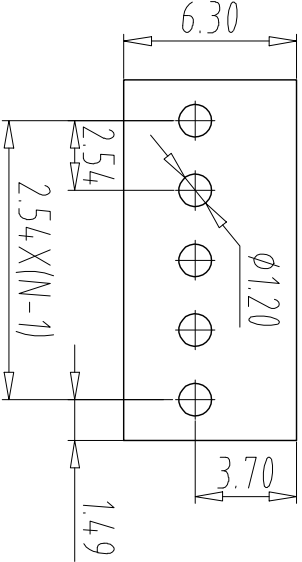

Total Pitch Tolerances										Nominal dimension range										±	≡	—	//																		
in mm										in mm																															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over																						
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over																						
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all																						
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100																						
± 0.18																				± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.2	0.3	0.5
± 0.18																				± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.23	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB17-308/254-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO., LTD.

DWGNO. UL0TB7Y000A