



6		5		4		3		2		1							
FILE: 2020-D01VUL0								REV		EC.N NO.		CONTENT		CHK		DATE	

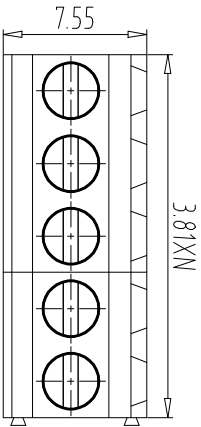


NOTES1:
UL Standard
1. Rating voltage/current: 300V/12A
3.Wire range:16-26AWG
IEC Standard

1.	Pollution Degree	2
	Overvoltage Category	III
	Rate Impulse Voltage(KV)	2.5KV
	Rate Voltage(V)	130V
	Rate Current(A)	10A

2.Wire range: 0.2-1.0mm²

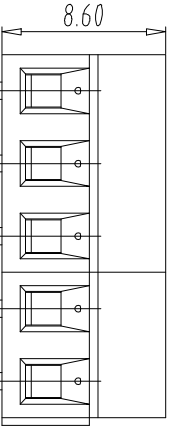

NOTES2:
1.Housing: PA66(UL94V-0)
2.Screw:Steel(M2.5/Zn Plated)
3.Spring: Brass(Tin Plated)
4.Block: Brass(Ni Plated)



NOTES3:
1.Pitch: 3.81mm Poles: 02-24P
2.Stripping length: 6-7mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

UL0-TB17 - 381/381 - XXP - Y 0 0 0 A

Certificate Factory poles Customer requirements
Series NO. Code

color:
1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:white

PCB layout

A		Total Pitch Tolerances										Nominal dimension range															
		in mm										in mm															
over	under	over	under	over	under	over	under	over	under	over	under	over	under	over	under	over	under	over	under	over	under	over	under	over	under		
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	over		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to			
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	to	to	to	to	to			
±0.18		±0.20		±0.25		±0.3		±0.35		±0.44		±0.55		±0.70		±0.75		±0.20		±0.25		±0.30		±0.35			
5		5		5		5		5		5		5		5		5		5		5		5		5			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.06.02	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB17-381/381-XXP-Y000A		
			NINGBO UL0 ELECTRONICS CO.,LTD.		
宁波欧路电子有限公司			DWGNO.		
			UL0TB17Y000A		