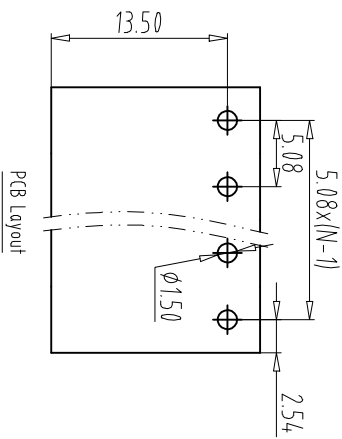

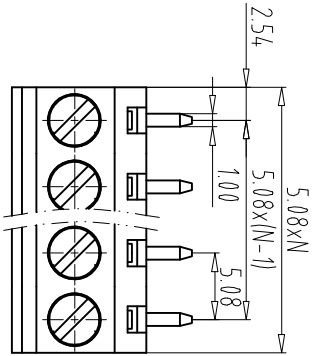


Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	500V	—	500V

2.Wire range: 30~12AWG
3.Torque value: M2.5, 3.54lb.in
IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	250V
Rate Current(A)	18A

2.Wire range: 1.0~2.5mm²
3.Torque value: M2.5, 0.4Nm

- NOTES2:
- 1.Housing: PA66(UL94V-0)
 - 2.Block: Brass(Ni Plated)
 - 3.Solderpin: Brass(Tin Plated)
 - 4.Screw: Steel(M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
2.Stripping length: 6mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

UL0-TB72 - 128R/5.08 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

- color:
- 1.Grey 6.Red
 - 2.Blue 7.Transparent
 - 3.Black 8.Yellow
 - 4.Green 9.White
 - 5.Orange

Total Pitch Tolerances												Nominal dimension range												—		//	
in mm												in mm															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	over		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to	to	to		
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150	150	150	150	150		
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.5		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.06.03	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB72-128R/5.08-XXP-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO.	UL0TB72Y000A



NINGBO UL0 ELECTRONICS CO.,LTD.

UL0TB72Y000A